

BEST AVAILABLE COPY

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 May 2005 (26.05.2005)

PCT

(10) International Publication Number
WO 2005/046477 A2

(51) International Patent Classification: A61B 5/15

(21) International Application Number:
PCT/US2004/037788

(22) International Filing Date:
12 November 2004 (12.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/519,232 12 November 2003 (12.11.2003) US

(71) Applicant (for all designated States except US): FACET
TECHNOLOGIES, LLC [US/US]; 1850 Parkway Place,
Suite 900, Marietta, GA 30067 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): CONWAY, William,
E. [US/US]; 1609 Countryside Place, Smyrna, GA 30080
(US) RUF, Christopher, J. [US/US]; 2120 Ithica Drive,


Marietta, GA 30067-7054 (US). IRWIN, John, C.
[US/US]; 148 Springwater Trace, Woodstock, GA 30188
(US). FLYNN, Stephen, J. [US/US]; 605 Wheatleigh
Curve, Peachtree City, GA 30269 (US). ROBBINS, Avi,
M. [US/US]; 539 Timber Ridge Drive, Longwood, FL
32779 (US). VANHIEL, Brian, D. [US/US]; 3993 Plum-
crest Circle, Smyrna, GA 30082 (US). LEUTZ, Brian,
D. [US/US]; 331 Conyers Road, McDonough, GA 30253
(US). LEVAUGHN, Richard, W. [US/US]; 532 Sullivan
Road, Newnan, GA 30265 (US). LIPOMA, Michael,
V. [US/US]; 4066 Argonne Court, Villa Rica, GA 30180
(US).

(74) Agent: GROFF, Bradley, K.; Gardner Groff, P.C., 100
Parkwood Point, 2018 Powers Ferry Road, Suite 800, At-
lanta, GA 30339 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,

[Continued on next page]

(54) Title: LANCING DEVICE AND MULTI-LANCET CARTRIDGE

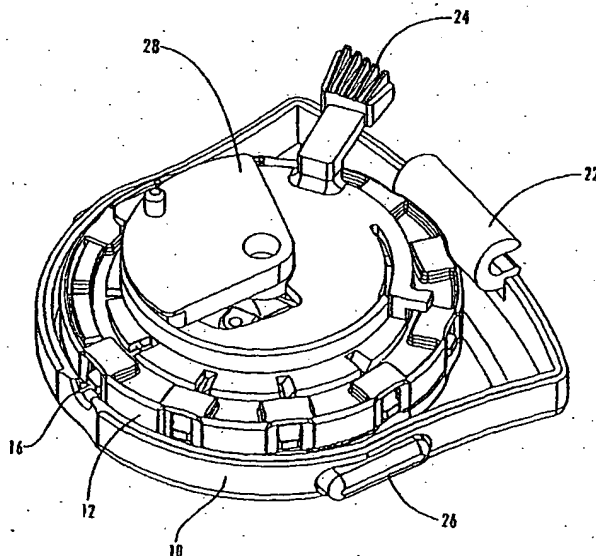

(57) Abstract: A lancing device and a removable and replaceable multi-lancet cartridge for use in connection therewith are disclosed. The multi-lancet cartridge is advanced through sequential lancets, and anti-reverse features prevent reverse advancement of the cartridge. Interlocks are provided to prevent double-cocking the device, to reduce the likelihood of jamming of the mechanism. Improved trigger mechanisms and depth control mechanisms are provided.

WO 2005/046477 A2

WO 2005/046477 A2

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676

LANCING DEVICE AND MULTI-LANCET CARTRIDGE

Cross Reference to Related Applications

[0001] This application claims the benefit of U.S. Provisional Patent Application Serial No. 60/519,232, filed November 12, 2003; the content of which is hereby incorporated herein by reference in its entirety.

Technical Field

[0002] The present invention relates generally to medical devices and procedures, and to related methods of manufacture; and more particularly to lancing devices for the collection and/or analysis of samples of blood or other bodily fluids, and to replaceable multi-lancet cartridge assemblies for use in connection with such lancing devices.

Background of the Invention

[0003] Many medical procedures require puncturing of the skin, and sometimes underlying tissues, of an animal or human subject. For example, a sharp lancet tip is commonly used to puncture the subject's skin at a lancing site to obtain a sample of blood, interstitial fluid or other body fluid, as for example in blood glucose monitoring by diabetics and in blood typing and screening applications.

[0004] In some instances, a person must periodically sample their blood for multiple testing throughout the day or week. Because re-use of a lancet can result in infection or spread of blood borne contaminants, persons requiring repeated testing often must carry multiple lancets with them, which are separately loaded into a lancing device for each sampling. This can be inconvenient and may lead to reduced compliance with a prescribed test regimen. Additionally, the need for repeated loading and unloading of lancets into a lancing device can be quite conspicuous and distracting to others when done in public, resulting in reduced compliance by some users.

[0005] Accordingly, improved lancing devices have been developed, which are capable of carrying out multiple sampling procedures without the need for separately loading individual lancets. For example, PCT International Publication No. WO 03/071940 A1 (International Application No. PCT/US03/05159, filed 20 February 2003), which is incorporated herein by reference, discloses a lancing device including a replaceable multi-lancet cartridge. Such lancing devices provide considerable advantage over single-lancet devices, warranting continued development of related technologies capable of providing further improved convenience and discretion in use.

[0006] It is to the provision of an improved sampling device and cartridge meeting these and other needs that the present invention is primarily directed.

Summary of the Invention

[0007] Briefly described, example embodiments of the present invention include an improved sampling device that is convenient, compact, and includes multiple lancets in a single replaceable cassette or cartridge. The improvements of the present invention preferably increase convenience and discretion for the user, thereby encouraging more frequent testing and insuring compliance with the subject's prescribed testing regimen.

[0008] In one aspect, the present invention is a lancing device including a plurality of lancets; an advancing mechanism for sequentially advancing the lancets in a first direction and bringing an active one of the lancets into engagement with a drive mechanism; and an anti-reverse mechanism for preventing advancement of the lancets in a second direction opposite the first direction.

[0009] In another aspect, the invention is a lancing device including a replaceable multi-lancet cartridge, a drive mechanism for driving an active lancet of the multi-lancet cartridge between a cocked position and a lancing position, and an interlock for preventing advancement of the cartridge when the drive mechanism is cocked.

[00010] In still another aspect, the invention is a lancing device including a plurality of lancets in an array, and an advancing mechanism to advance through the array of lancets and successively bring each of the plurality of lancets into an active position. The advancing mechanism preferably includes indexing means to prevent partial advancement of the array to a position where no lancet is in the active position.

[00011] In another aspect, the invention is a lancing device including a replaceable multi-lancet cartridge having a plurality of lancets associated therewith, and lancet retaining means to prevent the lancets from being displaced from the cartridge until advanced into an active position.

[00012] In another aspect, the invention is a replaceable multi-lancet cartridge for a lancing device, the cartridge including a plurality of lancets, each lancet having a removable endcap associated therewith, and at least one spring for biasing removed endcaps out of a path of travel of their associated lancets, the at least one spring being initially flat, and being flexed upon assembly into the cartridge.

[00013] In yet another aspect, the invention is a lancing device including a drive piston, a drive spring for advancing the drive piston, and a return spring for retracting the drive piston. One of the drive spring or the return spring surrounds an exterior portion of the drive piston, and the other spring is captured within an internal recess of the drive piston.

[00014] In another aspect, the invention is a lancing device including a drive piston movable between a cocked position and a fired position. The lancing device further includes a trigger mechanism having a release member defining an aperture, wherein an expanded portion of the drive piston is releasably engageable within the aperture of the release member to retain the drive piston in its cocked position until released.

[00015] In another aspect, the invention is a lancing device for use in combination with a multi-lancet cartridge comprising a plurality of lancets, the lancing device including a housing, a drive mechanism, an advancing mechanism for bringing the lancets of the multi-

lancet cartridge sequentially into engagement with the drive mechanism, and a depth-control mechanism providing adjustment of a depth of penetration of an active one of the lancets.

[00016] These and other aspects, features and advantages of the invention will be understood with reference to the drawing figures and detailed description herein, and will be realized by means of the various elements and combinations particularly pointed out in the appended claims. It is to be understood that both the foregoing general description and the following brief description of the drawings and detailed description of the invention are exemplary and explanatory of preferred embodiments of the invention, and are not restrictive of the invention, as claimed.

Brief Description of the Drawing Figures

[00017] FIGURE 1 is a perspective schematic view of a lancing device and a cartridge according to an example embodiment of the invention

[00018] FIGURES 2a and 2b are a perspective and an assembly view of a multi-lancet cartridge according to an example embodiment of the invention.

[00019] FIGURE 3 is a perspective view of a lancing device according to another example embodiment of the invention, having a cartridge loaded therein, and with an upper portion of the housing removed for clarity.

[00020] FIGURE 4 shows the drive mechanism portion of a lancing device according to another example embodiment of the invention, including a ratchet mechanism for preventing partial cocking.

[00021] FIGURES 5a – 5c show a torsion spring mechanism for advancing through sequential lancets of a lancet cartridge, and to prevent reverse movement and/or partial advancement between lancets, in a lancing device according to another example embodiment of the invention.

[00022] FIGURE 6 shows a rotating advancer mechanism of a lancing device for advancing through sequential lancets of a lancet cartridge, according to an example embodiment of the invention.

[00023] FIGURES 7a and 7b show a leaf spring mechanism for indexing and advancement through sequential lancets of a lancet cartridge, and to prevent reverse movement of the cartridge, according to another example embodiment of the invention.

[00024] FIGURES 8a and 8b show an indexer arm mechanism for engagement with cooperating features of a lancet cartridge to index and advance through sequential lancets of a lancet cartridge, and to prevent reverse movement of the cartridge, according to another example embodiment of the invention.

[00025] FIGURE 9 shows an embodiment of a lancet cartridge having a lancet-retaining ring for preventing lancets from moving radially until advanced into a firing position.

[00026] FIGURES 10a and 10b show an embodiment of a lancet cartridge having a plurality of molded cantilevers in the cartridge top cover for lancet retention.

[00027] FIGURES 11a and 11b show a cartridge embodiment having a flat stamped spring ring with a plurality of individual spring loops for biasing removed lancet caps out of the lancet's travel path.

[00028] FIGURE 12 shows a cartridge embodiment having transversely-biased spring members for biasing removed lancet caps out of the lancet's travel path.

[00029] FIGURES 13a – 13c show different embodiments of spring clip members for retraction of the protective endcap of each individual lancet.

[00030] FIGURE 14 shows a cartridge embodiment having lancet hold-down snaps for retaining individual lancets.

[00031] FIGURE 15 shows an anti-rotation interlock mechanism for locking the cartridge when the drive mechanism is cocked and allowing advancement of the cartridge after firing, according to an example embodiment of the invention.

[00032] FIGURES 16a and 16b show an anti-rotation interlock mechanism according to another embodiment of the invention.

[00033] FIGURE 17 shows another embodiment of a lancing device according to the present invention, having a spring-biased plunger for indexing and advancement through sequential lancets of a lancet cartridge, and to prevent reverse movement of the cartridge.

[00034] FIGURE 18 shows another embodiment of a lancing device, including a cantilevered spring arm for preventing double-cocking of the lancing device.

[00035] FIGURE 19 shows a lancet drive mechanism of a lancing device according to an example embodiment of the invention, having an in-line configuration of the drive and return springs.

[00036] FIGURE 20 shows a lancet drive mechanism of a lancing device according to another embodiment of the invention, having the drive and return springs in a laterally-offset configuration.

[00037] FIGURE 21 shows a trigger mechanism for a lancing device according to an example embodiment of the invention, having a transversely-sliding cage for engaging and releasing the drive piston.

[00038] FIGURES 22 - 26 show trigger mechanisms according to alternate embodiments of the invention, having shutter mechanisms for engaging and releasing the drive piston.

[00039] FIGURES 27a and 27b show another embodiment of a trigger mechanism for a lancing device, having a flexing trigger button arm with a shutter aperture at its free end.

- [00040] FIGURE 28 shows another embodiment of a trigger mechanism for a lancing device, having a flexing trigger button element integrally molded with the drive piston.
- [00041] FIGURES 29a and 29b show another embodiment of a trigger mechanism for a lancing device, having a hinged trigger button.
- [00042] FIGURE 30 shows a rotational depth-control mechanism for a lancing device, according to an example embodiment of the invention.
- [00043] FIGURE 31 shows a pivotal depth-control member for a lancing device.
- [00044] FIGURE 32 shows a translational depth-control mechanism for a lancing device.
- [00045] FIGURE 33 shows a screw-driven translational depth-control member for a lancing device.
- [00046] FIGURES 34-36 show several alternate embodiments of a rotating disk depth-control member for a lancing device.
- [00047] FIGURE 37 shows a cam slot driven translational depth-control mechanism for a lancing device.
- [00048] FIGURE 38 shows a screw slot driven translational depth-control mechanism for a lancing device.
- [00049] FIGURE 39 shows a geared translational depth-control mechanism for a lancing device.
- [00050] FIGURE 40 shows a multi-shutter depth-control mechanism for a lancing device.
- [00051] FIGURE 41 shows alternate forms of direct and indirect actuation of depth-control mechanisms for a lancing device.

[00052] FIGURES 42 and 43 show alternate forms of pivotal depth-control mechanisms for a lancing device.

[00053] FIGURE 44 shows an extensible iris depth-control mechanism for a lancing device.

[00054] FIGURE 45 shows a pivoting panel depth-control mechanism for a lancing device.

[00055] FIGURE 46 shows a slotted depth-control mechanism for a lancing device.

[00056] FIGURE 47 shows a flexible strip depth-control mechanism for a lancing device.

[00057] FIGURE 48 shows a gear-driven translational depth-control mechanism for a lancing device.

[00058] FIGURE 49 shows a removable member depth-control mechanism for a lancing device.

[00059] FIGURES 50-53 show alternate embodiments of rotational member depth-control mechanisms for a lancing device.

[00060] **Detailed Description of Example Embodiments**

[00061] The present invention may be understood more readily by reference to the following detailed description of the invention taken in connection with the accompanying drawing figures, which form a part of this disclosure. It is to be understood that this invention is not limited to the specific devices, methods, conditions or parameters described and/or shown herein, and that the terminology used herein is for the purpose of describing particular embodiments by way of example only and is not intended to be limiting of the claimed invention. Also, as used in the specification including the appended claims, the singular forms "a," "an," and "the" include the plural, and reference to a particular numerical value includes at least that particular value, unless the context clearly

dictates otherwise. Ranges may be expressed herein as from "about" or "approximately" one particular value and/or to "about" or "approximately" another particular value. When such a range is expressed, another embodiment includes from the one particular value and/or to the other particular value. Similarly, when values are expressed as approximations, by use of the antecedent "about," it will be understood that the particular value forms another embodiment.

[00062] In its various embodiments, the present invention provides an improved lancing device 10, preferably for use in combination with a replaceable multi-lancet cartridge 12, as shown schematically for example in FIGURE 1. While the improvements of the present invention are adaptable for application in connection with various forms of multi-lancet lancing devices, PCT International Publication No. WO 03/071940 A1, incorporated herein by reference, shows an example form of a multi-lancet lancing device to which the improvements of the present invention are of potential application. It will be recognized that the improvements disclosed herein are of individual advantage, or can be used in combination with one another. In general, the lancing device 10 of the present invention comprises a housing defining a chamber for receiving the cartridge; a drive mechanism for propelling an active lancet of the cartridge through a lancing stroke, from a retracted position within the cartridge to an advanced position wherein a sharp tip of the active lancet projects through a lancet opening in the housing to pierce the subject's skin at an intended lancing site; a charging mechanism for energizing the drive mechanism; and an advancing mechanism for sequentially advancing lancets of the cartridge into and through the active position. Various of these mechanisms can be combined; for example, a single mechanism optionally serves to energize the drive mechanism and simultaneously or sequentially advance the cartridge.

[00063] FIGURE 2 shows a replaceable multi-lancet cartridge 12 according to an example embodiment of the present invention. The cartridge 12 preferably comprises a lancet carrier or base 14, preferably defining a plurality of lancet guide tracks through which individual lancets traverse upon actuation, defining their respective lancing strokes. The

cartridge 12 preferably comprises a plurality of lancets 16, each slideable within a corresponding guide track. Each lancet 16 preferably comprises a lancet body having a sharp lancet tip projecting therefrom, and a removable protective endcap covering the sharp lancet tip. One or more biasing members 18 are preferably provided, for moving protective endcaps removed from the lancets out of the path of travel of each active lancet as it traverses its lancing stroke. A cover 20 preferably overlies the lancets and couples with the base 14 to provide an enclosure. The cover optionally comprises numerical or other indicia, observable from the exterior of the lancing device when in use, showing which lancet is in use, and/or how many lancets remain for use, and/or that the device is full (unused cartridge) and/or empty (fully used cartridge).

[00064] FIGURE 3 shows a lancing device 10, with its upper housing half-shell removed for clarity, having a multi-lancet cartridge 12 installed therein. The upper housing half-shell would be pivotally connected to the lower housing half-shell by a hinge coupling 22, as partially depicted. An arm 24 is pivotally operable to advance the cartridge to bring sequential lancets 16 of the cartridge into the active position, and to energize the drive mechanism and de-cap the active lancet. An activation button or trigger 26 releases the drive mechanism to propel the active lancet through its lancing stroke. A depth-control mechanism 28 is provided, to allow the user to selectively adjust the penetration depth of the lancet.

Advancing and Indexing

[00065] Example embodiments of the lancing device of the present invention preferably include one or more mechanisms for advancing through sequential lancets of a multi-lancet cartridge or lancet array, for indexing the advancement to prevent partial advancement of the cartridge to a position between lancets wherein no lancet is in the active position, to prevent double-cocking the device and thereby advancing a lancet into and through the active position without using that lancet, and/or to prevent reverse operation and potential re-use of a lancet.

[00066] For example, FIGURE 4 shows an anti-reverse mechanism for a multi-lancet lancing device according to an example embodiment of the present invention. A ratchet and pawl mechanism 40 allows the device to be advanced through sequential lancets of a lancet array in or on a lancet cartridge, and prevents reverse movement and/or partial advancement between lancets. As the drive piston 42 is energized, a contact surface 44 preferably engages the pawl 46 at the limit of its travel, releasing the ratchet 48 to allow the advancing and/or arming mechanism to return to its normal or default position. In this manner, the advancing mechanism operates in a back-and-forth manner, wherein the user actuates the mechanism in a first or forward direction in engagement with the cartridge to advance the cartridge to the next lancet, and in a second or reverse direction out of engagement with the cartridge to return the mechanism to its original position. In alternate embodiments, the advancing mechanism is actuated continuously in one direction (i.e., clockwise or counter-clockwise) through all the lancets of the cartridge, without the need for any return stroke.

[00067] FIGURES 5a – 5c show another embodiment of an anti-reverse mechanism, including a torsion spring 50 for engagement with cooperating detents 52 in the cartridge, forming a ratchet mechanism to allow the cartridge to advance through sequential lancets, and to prevent reverse movement of the cartridge. The mechanism preferably also provides indexing of the advancement through sequential lancets, to prevent partial advancement between lancets. In alternate embodiments, a frictional clutch mechanism is provided to prevent reverse movement of the cartridge.

[00068] FIGURE 6 shows a rotational advancing mechanism 60 for a multi-lancet lancing device according to an example embodiment of the invention. The advancing mechanism includes an external rotating advancer knob 62, coupled to an internal advancer 64 that engages the cartridge to advance through sequential lancets when the user rotationally actuates the knob.

[00069] FIGURES 7a and 7b show an anti-reverse mechanism for a multi-lancet lancing device according to an example embodiment of the invention, including a leaf spring 70 having a tooth or finger 72 for engagement with cooperating detents 74 in the lancet cartridge for indexing and advancement through sequential lancets of the cartridge, and to prevent reverse movement of the cartridge.

[00070] FIGURES 8a and 8b show an advancing knob 80 having an indexer arm 82 mounted, as by heat staking or adhesive, to a central hub 83 of the knob. The arm 82 is preferably formed as a double-ended flexible metal member. Each end of the arm preferably includes a first angled finger 84 for engagement with cooperating features of the lancet cartridge to index and advance the cartridge through sequential lancets, and a second angled finger 86 for tracking a cam surface within the lancing device housing to flex the indexer arm 82 into and out of engagement with the cartridge at the appropriate location of the actuation sequence. This mechanism allows the advancing knob 80 to be rotationally actuated in a single direction, 180° per index step, without the need for a return stroke. Symmetrical guidance and advancing features 88 are preferably arranged adjacent the angled fingers at either end.

Lancet and Endcap Retention

[00071] Example embodiments of the lancing device of the present invention preferably also comprise features for retaining lancets in position in or on a multi-lancet cartridge until advanced into engagement with the drive mechanism at the active lancet position. In this manner, inadvertent discharge of lancets from a cartridge, jamming, and/or noise due to rattling of loose lancets in a cartridge is prevented. The lancing device preferably also includes features for displacing protective endcaps that are removed from the active lancet out of the lancet's path of travel along the lancing stroke, and retaining the removed endcaps.

[00072] For example, FIGURE 9 shows a multi-lancet cartridge 90 according to an example embodiment of the invention having a lancet-retaining ring 92 for preventing

lancets from moving radially until advanced into a firing or "active" position beneath a split or open segment of the ring 92. A retaining pin or projection 94 can be provided on each lancet for engagement with a cooperating track, channel or edge of the ring. The ring 92 optionally includes a limit member 96 to prevent further advancement of the lancet cartridge after it has been advanced through all of the lancets, to prevent re-use of lancets.

[00073] FIGURES 10a and 10b show an embodiment of the invention having a plurality of molded cantilevers 100 formed in a top cover portion of the cartridge for retaining lancets in position in the cartridge until the lancet is advanced into the active position. A lancet retaining pin 102 on each cantilever engages a respective lancet 104 to secure it in position, until the lancet is advanced into the active position, wherein a lifter 106 engages the cantilever 100 to flex it out of engagement with the active lancet 104, releasing the lancet for firing.

[00074] FIGURES 11a and 11b show a cartridge cover 110 having a flat stamped spring ring 112 with a plurality of individual spring loops 114 mounted thereon. The spring ring 112 is preferably attached to the cover 110 by press-fitting holes of the spring ring onto Tinnerman-style pins, and a raised ring or flange 116 projecting from the cover causes each of spring loops 114 to be outwardly deflected during assembly to preload the loops to bias the endcaps out of the plane of the lancet array upon removal from the lancet at the active position. The provision of a flat spring ring mounted in this manner has been found to provide easier and less expensive manufacture and handling during assembly than forming a pre-bent spring member. For further advantage during assembly, a plurality of such spring rings may be provided in a connected strip, or in a stacked array, for automated dispensing during production.

[00075] FIGURE 12 shows a cartridge 120 having a transversely-biased spring member 122 engaging the protective cap 124 of each lancet 126, for lateral, in-plane removal of the lancet cap. The spring member 122 is pre-loaded upon assembly, so that upon removal of the cap 124 from a lancet 126, the spring member pulls the cap to the

side, out of the active lancet's path of travel. This configuration allows removed endcaps to be stored in the same plane as the lancet array, yet still out of the active lancet's path of travel, thereby reducing the necessary cartridge thickness as compared to cartridges that store the removed endcaps in a well or recess beneath or above the plane of the lancets.

[00076] FIGURES 13a – 13c show alternate embodiments of individual spring clips 130, for use in a multi-lancet cartridge providing a separate spring clip member for engagement and retraction of the protective endcap of each individual lancet. In further alternate embodiments, two or more (for example; 2, 4, 5 or 10) connected spring clips are formed as a spring segment or strip, and multiple segments are installed with a spring clip engaging each lancet endcap.

[00077] FIGURE 14 shows a portion of a cartridge according to another embodiment of the invention, having resilient lancet hold-down snaps 140 for holding the lancets in place during assembly and use. The lancet is able to slide freely between the hold-down snaps, but the snaps prevent the lancets from being displaced from the cartridge. The snaps optionally also serve as directional guides for the lancet's travel during firing.

Cartridge Alignment

[00078] Example embodiments of the lancing device of the present invention preferably also include anti-rotation interlock features for fixing the cartridge in position when the drive mechanism of the device is charged (i.e., in its cocked configuration). In this manner, proper lancet alignment is maintained, and vibration and play in the drive mechanism are reduced.

[00079] For example, FIGURE 15 shows an anti-rotation interlock mechanism for a multi-lancet lancing device, comprising an arm 150 projecting from the distal end of the drive piston 152, opposite the lancet engaging jaw 154. The arm engages a cooperating recess or other surface feature of the lancet cartridge when the drive mechanism is

cocked, to prevent motion of the cartridge, but to allow advancement of the cartridge after firing.

[00080] In other example embodiments, such as shown in FIGURES 16a and 16b, the anti-rotation interlock features comprise a locking bolt 160, which is retracted upon contact with the drive piston 162 when the drive mechanism is cocked, to engage the lancet cartridge and lock it in position. A projection 164 on the lower face of the locking bolt 160 interfaces with a cooperating feature on the advancing mechanism to block further advancement of the cartridge and thereby prevent double-cocking and/or potential jamming. In other embodiments, the device includes a ratcheting retaining ring for retaining the lancets in place and for preventing double-cocking and/or re-use by preventing rotation of the lancet cartridge when the device is cocked.

[00081] FIGURE 17 shows an embodiment of the invention including a spring-biased plunger 170 having an inclined shoulder for engagement with cooperating detents in the lancet cartridge to index the cartridge as it is advanced through sequential lancets of the cartridge, and to prevent reverse movement of the cartridge.

[00082] The multi-lancet cartridge of the present invention optionally also includes a break-away section that differentiates a new cartridge from a used cartridge, to prevent accidental re-use of a potentially contaminated lancet. For example, a flag or indicator can be provided for manual displacement by the user, or which is automatically broken off of the cartridge or otherwise displaced upon insertion into the housing or upon initial advancement or firing. In its various embodiments, the cartridge can be assembled using assembly methods including one or more of: ultra-sonic welding, snaps, crush pins, solvent bonding, adhesive, thermal welding, and/or laser welding.

Drive Mechanism and Actuation

[00083] Example embodiments of the lancing device of the present invention preferably also include an improved drive mechanism, and/or an improved actuation (i.e., trigger) mechanism. For example, FIGURE 18 shows a portion of a drive mechanism for a

multi-lancet lancing device according to an example embodiment of the invention, including a cantilevered flexing interlock spring arm 180 for engagement with a cooperating interlock fin 182 on the drive piston, and a re-inforcement rib 184 in the mechanism base, to prevent double-cocking of the lancing device, thereby reducing the likelihood of jamming. In the depicted sequence of operation, the piston 182 is in its forward (fired) position when the user begins turning the advancer. The interlock arm 180 moves past the piston, and the piston locks in its rearward (charged) position. The advancer is then moved back along its return stroke, and the interlock arm 180 deflects under the piston 182. The interlock 180 then flexes back up, locking the advancer. The piston is charged, and the reinforcement rib 184 prevents the interlock fin of the piston 182 from bending.

[00084] FIGURE 19 shows a drive mechanism including an in-line piston assembly 190, having one of the drive spring 192 or return spring 194 externally mounted thereon, abutting against an exterior shoulder; and the other of the drive or return springs internally mounted within a bore in the distal end of the piston, in a coaxial nested manner. The opposed springs operate in tandem to advance and retract the piston (and the active lancet coupled thereto) through its lancing stroke.

[00085] FIGURE 20 shows another embodiment of a drive mechanism, including a laterally offset retraction spring 200 alongside the drive piston 202, and in the plane of the array of lancets in or on the cartridge. The retraction spring 200 operates against a laterally projecting arm 204 of the piston 202. The drive spring 206 is in line with the piston 202, and operates against the distal end of the piston.

[00086] FIGURE 21 shows an improved trigger mechanism according to an example embodiment of the invention. Actuation of the release button 210 drives a finger 212 connected to the button along an inclined surface 214 of a sliding cage 216, moving the cage transversely, and moving a sear surface 217 out of engagement with the drive piston 218 to release the piston and fire the device.

[00087] FIGURES 22 – 26 show various alternate embodiments of shutter trigger mechanisms according to example forms of the invention. In general, a barb or expanded portion 220 extending from the drive piston 222 releasably engages within an aperture 224 formed in a shutter or release member 226. The release member 226 is actuated to release the barb or expanded portion 220 from engagement with the aperture 224 to fire the lancing device. In the embodiment of FIGURE 26, a keyhole aperture 224 includes a large diameter portion allowing passage of expanded portion 220 therethrough, and a smaller diameter portion for engagement with a portion of the drive piston having a reduced diameter. An actuator button 228 or other member is preferably provided external of the lancing device housing, with a finger or other projection 230 extending through the housing into contact with the release member to actuate the device. One or more spring members 232 are preferably provided to return the shutter to the ready state after firing.

[00088] FIGURES 27a and 27b show a flexing trigger button mechanism having an actuator button 270 mounted to a flexing arm 271, coupled to a release member 272 having an aperture 274 formed therein for releasably engaging a barbed or angled arm 276 projecting from the distal end of the drive piston 278. Pressing the button 270 moves the release member 272 out of engagement with the arm 276 to release the piston 278 and fire the device. In the embodiment of FIGURE 28, a trigger release member 280 is integrally molded with the drive piston 282.

[00089] FIGURES 29a and 29b show a hinged trigger mechanism having a release button 290 on one side of a fulcrum 292, and a release or sear surface 294 on the opposite side of the fulcrum. Pressing the button 290 downward raises the sear surface 294 out of engagement with a cooperating trigger arm 296 projecting from the drive piston, releasing the drive piston to fire the device. A return spring 298 is preferably unitarily molded into the trigger mechanism.

[00090] In other embodiments, the device includes a trigger molded into the top cover of the lancet cartridge. For example, a trigger button and release arm may be integrally

molded with the top cover, as by forming at least a portion thereof of a flexible material. In still other alternate embodiments, a cantilevered trigger arm extends alongside the drive piston, and has a free end in releasable engagement with a cooperating surface of the drive piston. The free end of the trigger arm is flexed out of engagement with the drive piston to fire the device.

Depth Adjustment

[00091] Example embodiments of the lancing device of the present invention preferably also include improved depth control features for enabling the user to selectively vary the depth of penetration of the lancet tip into the skin at the lancing site. For example, FIGURE 30 shows a depth control mechanism according to an example embodiment of the invention, having a rotating plate 300 with multiple openings 302 therethrough for providing lancing depth adjustment. Depth adjustment can be accomplished, for example, by providing openings of different depth and/or diameter through a wall of the plate 300, by forming the wall of the plate to have different thicknesses at different points along its length, and/or by forming the wall to be radially offset by differing amounts at different angular positions. Rotation of the plate within the housing of the lancing device, for example by means of an external actuator member, brings the desired opening into alignment with the lancet opening through the housing.

[00092] FIGURE 31 shows a pivotal stroke-limiting depth control stop 310. The lancet impacts a generally arcuate contact face having a stepped surface with a plurality of stroke-limiting surfaces 312, each providing a different penetration depth. The user pivots the depth stop about an axis 314 to position the contact face with the selected portion of its stepped surface in line for contact with the active lancet to select the desired lancing depth.

[00093] FIGURE 32 shows a sliding plate depth-control mechanism 320 with a dial member 322 having an eccentric hub 324 rotationally mounted within a cooperating opening of a translationally sliding plate member 326. Rotation of the dial 322 adjusts the

position of a contact face 328 surrounding the lancet opening of the lancing device housing, to vary the depth of penetration.

[00094] In alternate embodiments, replaceable lancet cartridges are provided in different "sizes" for providing different lancing depths. For example, cartridges can be sold in "shallow", "medium" and "deep" sizes, and the user purchases the desired size. The cartridges are interchangeable for use with a standard lancing device, and the variation in depth can be provided, for example, by varying the lancet needle length, the wall thickness, etc. In still other embodiments, a positional adjustment mechanism such as a screw-driven rack is provided for varying the position of the cartridge and/or the drive mechanism within the housing of the lancing device. In still other embodiments, the position or spring constant (stiffness) of the return spring and/or the drive spring of the lancet drive mechanism can be varied to provide depth control.

[00095] FIGURE 33 shows a depth control mechanism incorporating a movable throttle plate 330 having front and back stops that move in tandem via actuation of a positioning screw 332 to provide depth adjustment.

[00096] The depth control mechanism of FIGURE 34 includes a circular threaded plate 340 with a lancet opening through its center, mounted within a cooperatively threaded opening 342 in the lancet device housing 344. The plate is turned to screw it in and out relative to the wall of the housing, providing a variable inner contact surface for limiting the stroke of the lancet, and/or a variable depth recess surrounding the lancet opening, for lancing depth control.

[00097] FIGURE 35 shows a depth control mechanism comprising a circular depth wheel 420 rotationally mounted to the housing 422, and having a plurality of lancet openings 424 of differing diameter angularly offset from one another. The user rotates the wheel 420 to bring a selected one of the lancet openings into alignment with the path of travel of the active lancet, thereby varying the penetration depth. Numerical or other indicia

426 on or coupled to the depth wheel 420 are optionally provided, visible from the exterior of the housing, to inform the user of the selected penetration depth.

[00098] FIGURE 36 shows a depth control mechanism comprising a tapered-thickness depth wheel 360 rotationally mounted to the housing. The depth wheel defines a plurality of angularly offset lancet openings, and has a wall thickness that varies about its circumference (i.e., different thicknesses at different angular displacements around the disk). The varying wall thickness allows the user to select the desired lancing depth by rotating the depth wheel to bring a selected one of the lancet openings into alignment with the path of travel of the active lancet.

[00099] The depth control mechanism of FIGURE 37 comprises a sliding plate 370 with an adjustable-position contact face 372 for placement against the lancing site to vary the depth of penetration. A pin 374 on the plate is engaged within an eccentric arcuate cam slot 376 of a depth-adjustment wheel 378, which the user rotates to vary the position of the contact face relative to a lancet stroke-limiting surface of the housing, to adjust the penetration depth.

[000100] FIGURE 38 shows a depth control mechanism having a sliding plate 380 with an adjustable-position contact face 382 for placement against the lancing site to vary the depth of penetration from lancing. A screw-drive mechanism 384 provides adjustment of the position of the contact face. FIGURE 39 shows a similar depth control mechanism having a sliding plate 390 with an adjustable-position contact face 392 for placement against the lancing site to vary the depth of penetration from lancing. A gear-driven threaded rod 394, with an end engaged in a threaded sleeve portion of the sliding plate 390, provides adjustment of the position of the contact face.

[000101] FIGURE 40 shows a depth control mechanism having one or more shutters 400 for varying the effective wall thickness of the housing of the lancet device to control lancing depth. Each shutter has a lancet opening therethrough, and can be moved

between a first position wherein its lancet opening is aligned with the path of travel of the active lancet, and a second position away from the path of travel of the active lancet. As successive shutters are moved to their respective first positions, their cumulative thickness increases the spacing between the forward face of the lancet body and the lancing site, thereby decreasing the penetration depth. Adjacent shutters are radially offset from one another, so that one, two, or more of the shutters can be selectively opened or closed to vary the lancing depth.

[000102] The depth control mechanism can comprise a depth control member 410 that is rigidly attached or integrally formed with an adjustment member 412, as shown for example in FIGURE 41a, wherein an inclined depth control member having a varying thickness along its length projects radially from the adjustment knob. Alternatively, the depth control mechanism comprises separate depth control and adjustment members directly or indirectly coupled by gearing or other linkage means, as shown for example in FIGURES 41b - 41f.

[000103] The angular position of the pivotal depth control member 420a of FIGURE 42a is adjusted via gear drive 422a to selectively position one of the stepped contact faces 424a to limit the stroke of the lancet. The angular position of the pivotal depth control member 420b of FIGURE 42b is adjusted via a toggle linkage 422b having a sliding pivot joint 424b, to selectively position one of the stepped contact faces 426b to limit the stroke of the lancet.

[000104] The depth control mechanism of FIGURE 43 includes an axial spur gear 430 mounted to the adjustment knob 432, driving a toothed track 434 to align a selected contact face portion of the depth control member 436 to limit the stroke of the lancet and thereby control penetration depth. The depth control member can comprise a stepped contact face (436), or an inclined contact face (436'). A detent cantilever 438 is optionally provided, contacting the toothed surface of the spur gear 430 for indexing and tactile feedback to the user.

[000105] The depth control mechanism of **FIGURE 44** comprises an adjustable-width sliding iris having opposed halves **440a**, **440b** that can be moved closer to or further away from one another to reduce or increase the opening size, thereby varying the extent to which the subject's skin may bulge into the opening to vary penetration depth. A larger opening size allows the skin of the lancing site to be received further therein for deeper lancing, and a smaller opening size providing shallower lancing. **FIGURE 45** shows a depth control mechanism having a pivoting contact plate **450**, the position of which is angularly variable relative to the position of the lancing cartridge **452**, by means of a hinged connection **454** to the housing **456**, to adjust the depth of penetration.

[000106] **FIGURE 46** shows a depth control mechanism having a contact face **460** for placement against the skin at the lancing site, the contact face comprising a tapered slot **462**, wider at one end than at the other. Adjustment of the position of the tapered slot relative to the lancet opening **464** varies the effective opening size, thereby varying the depth of penetration.

[000107] **FIGURE 47** shows a depth control mechanism having a flexible sliding band **470** defining a contact face for placement against the skin at the lancing site, and selectively movable across the housing in front of the housing's lancet opening. The thickness of the band **470** varies along its length, and/or the dimension of the opening(s) **472** through the band varies, to provide lancing depth adjustment. A geared adjustment knob **474a**, or pin-and-detent slide coupling **474b** provide positional adjustment of the band **470** relative to the housing. The geared face of the adjustment knob **474a** can operate vertically on a toothed surface on the front or back face of the band as shown, or can operate horizontally on a toothed surface on the top or bottom edge of the band. Depth indicators can be provided on or adjacent the adjustment knob (**476a**) or the slide coupling (**476b**); and/or along the band (**476b'**) for viewing through a window adjacent the openings. Optionally, the band **470** can be moved completely out of the way of the lancet opening through the housing, to provide maximum lancing depth, as for alternate site lancing. In

alternate forms, the band slides within the housing, behind a contact surface for placement against the skin at the lancing site, to limit the stroke of the lancet and/or to vary the opening size, and thereby control penetration depth.

[000108] The depth control mechanism of FIGURE 48 comprises a rack-and-pinion drive mechanism 480 for advancing and retracting the position of a sliding plate 482 along a first axis (indicated by directional arrow 484), the sliding plate having a contact face for contact with the skin at the lancing site, to adjust lancing depth. Optionally, the sliding plate 482 can slide along a second axis (indicated by directional arrow 486), perpendicular to the first axis, to move the plate out of the path of the active lancet for maximum penetration depth, as for alternate site lancing.

[000109] FIGURE 49 shows a depth control mechanism having a depth adjustment insert member 490 with a flange selectively insertable or removable to and from the device housing 492 adjacent the lancet opening 494, to limit the stroke of the lancet 496 and thereby vary depth of penetration.

[000110] FIGURE 50 shows a depth control mechanism having an outer housing 500 with openings of different sizes, and an inner mechanism 502 rotationally mounted within the housing to select one of the openings for alignment with the active lancet, and thereby control lancing depth. FIGURE 51 shows a depth control mechanism having an external sliding plate 510 with varying wall thickness and/or opening sizes, which is selectively movable along the housing to align one of the openings with the active lancet and thereby vary the lancing depth. The sliding plate 510 optionally serves also as a latch to secure the upper and lower housing halves to one another.

[000111] FIGURE 52 shows a depth control mechanism having a continuous depth adjustment ring 520 rotationally captured between the lancing device mechanism base 522 and the bottom housing enclosure 524. The ring 520 has varying opening sizes and/or wall thickness to control lancing depth. One or more portions of the ring 520 are accessible

from the exterior of the housing through opening(s) 526 in the bottom housing enclosure 524, to permit rotational adjustment of the ring by the user.

[000112] FIGURE 53 shows a depth control mechanism having a depth adjustment band 530 movably mounted along the outside of the housing, and having varying opening sizes and/or wall thickness to control lancing depth. A sliding adjustment knob 532 is preferably provided for controlling the positioning of the depth adjustment band 530.

[000113] While the invention has been described with reference to preferred and example embodiments, it will be understood by those skilled in the art that a variety of modifications, additions and deletions are within the scope of the invention, as defined by the following claims.

CLAIMS

What is claimed is:

1. A lancing device comprising a plurality of lancets; an advancing mechanism for sequentially advancing the lancets in a first direction and bringing an active one of the lancets into engagement with a drive mechanism; and an anti-reverse mechanism for preventing advancement of the lancets in a second direction opposite the first direction.
2. The lancing device of Claim 1, wherein the plurality of lancets are arrayed within a multi-lancet cartridge.
3. The lancing device of Claim 1, wherein the anti-reverse mechanism comprises a ratchet and pawl.
4. The lancing device of Claim 1, wherein the anti-reverse mechanism comprises a torsion spring.
5. The lancing device of Claim 1, wherein the anti-reverse mechanism comprises a spring-loaded plunger.
6. The lancing device of Claim 1, wherein the advancing mechanism comprises a rotationally-mounted advancing knob.
7. The lancing device of Claim 6, wherein the advancing knob is rotational in a first rotational direction only.
8. The lancing device of Claim 6, wherein the advancing knob is rotational in a first rotational direction along an advancing stroke to advance the lancets, and in a second rotational direction opposite the first rotational direction along a return stroke to return the advancing mechanism to a ready state.
9. The lancing device of Claim 8, further comprising means for preventing partial advancement of the lancets by preventing return of the advancing mechanism in the second direction until a full advancing stroke is completed.

10. A lancing device comprising a replaceable multi-lancet cartridge, a drive mechanism for driving an active lancet of the multi-lancet cartridge between a cocked position and a lancing position, and an interlock for preventing advancement of the cartridge when the drive mechanism is cocked.
11. The lancing device of Claim 10, wherein the interlock comprises an arm projecting from the drive mechanism, for engaging a cooperating surface feature of the multi-lancet cartridge when the drive mechanism is cocked.
12. The lancing device of Claim 10, wherein the interlock comprises a locking bolt that is retracted upon contact with the drive mechanism when cocked, to engage the lancet cartridge and lock it in position.
13. A lancing device comprising a plurality of lancets in an array, and an advancing mechanism to advance through the array of lancets and successively bring each of the plurality of lancets into an active position, wherein the advancing mechanism comprises indexing means to prevent partial advancement of the array to a position where no lancet is in the active position.
14. The lancing device of Claim 13, wherein the array of lancets are in a replaceable multi-lancet cartridge.
15. The lancing device of Claim 14, wherein the indexing means comprises a series of spaced recesses formed in the exterior of the multi-lancet cartridge, and a flexible member for releasable engagement within at least one of the recesses.
16. The lancing device of Claim 15, wherein the flexible member comprises an arm having a first angled finger for engagement with one of the recesses of the lancet cartridge, and a second angled finger for tracking a cam surface to flex the first angled finger into and out of engagement with the cartridge.

27

17. A lancing device comprising a replaceable multi-lancet cartridge having a plurality of lancets associated therewith, and lancet retaining means to prevent the lancets from being displaced from the cartridge until advanced into an active position.
18. The lancing device of Claim 17, wherein the lancet retaining means comprise a split retaining ring.
19. The lancing device of Claim 17, wherein the lancet retaining means comprise a plurality of molded cantilevers formed in a top cover portion of the cartridge.
20. The lancing device of Claim 17, wherein the lancet retaining means comprises at least one resilient hold-down snap for retaining each lancet in the cartridge.
21. The lancing device of Claim 17, wherein the retaining means further comprise a limit member to prevent re-use of lancets in the cartridge.
22. A replaceable multi-lancet cartridge for a lancing device, the cartridge comprising a plurality of lancets, each lancet having a removable endcap associated therewith, and at least one spring for biasing removed endcaps out of a path of travel of their associated lancets, said at least one spring being initially flat, and being flexed upon assembly into the cartridge.
23. A lancing device comprising a drive piston, a drive spring for advancing the drive piston, and a return spring for retracting the drive piston, wherein one of the drive spring and the return spring surrounds an exterior portion of the drive piston, and the other of the drive spring and the return spring is captured within an internal recess of the drive piston.
24. A lancing device comprising a drive piston movable between a cocked position and a fired position, the lancing device further comprising a trigger mechanism having a release member defining an aperture, wherein an expanded portion of the drive piston is releasably engageable within the aperture of the release member to retain the drive piston in its cocked position until released.

25. A lancing device for use in combination with a multi-lancet cartridge comprising a plurality of lancets, the lancing device comprising a housing, a drive mechanism, an advancing mechanism for bringing the lancets of the multi-lancet cartridge sequentially into engagement with the drive mechanism, and a depth-control mechanism providing adjustment of a depth of penetration of an active one of the lancets.

1/44

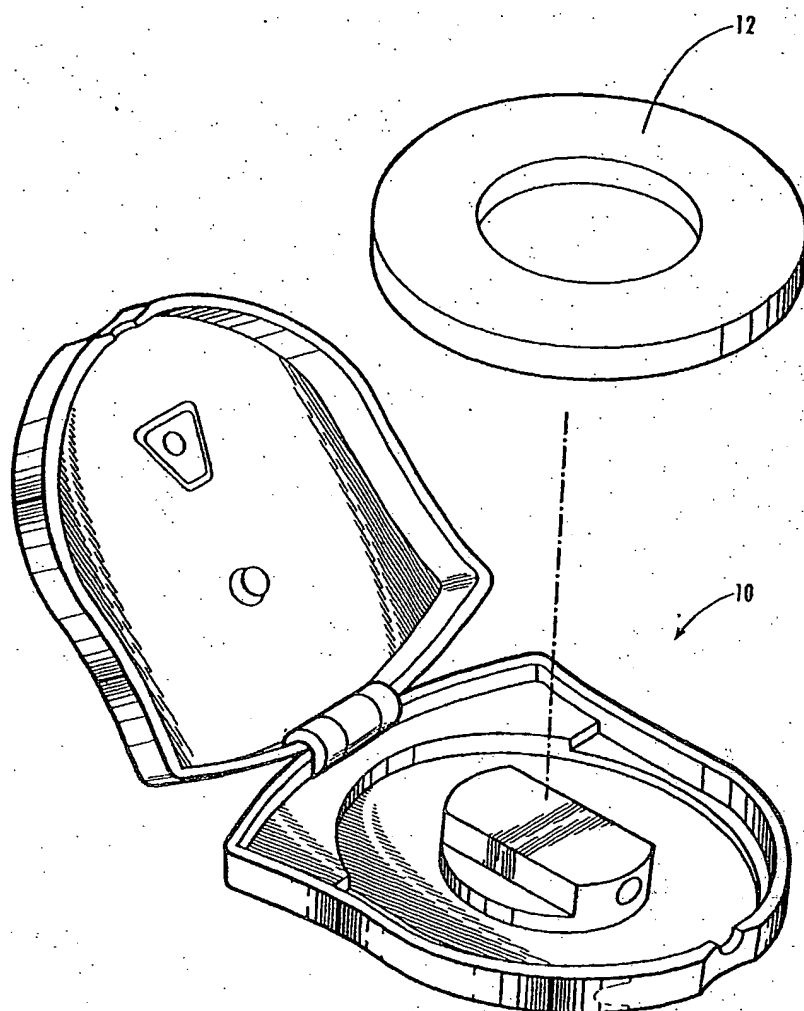


Fig. 1

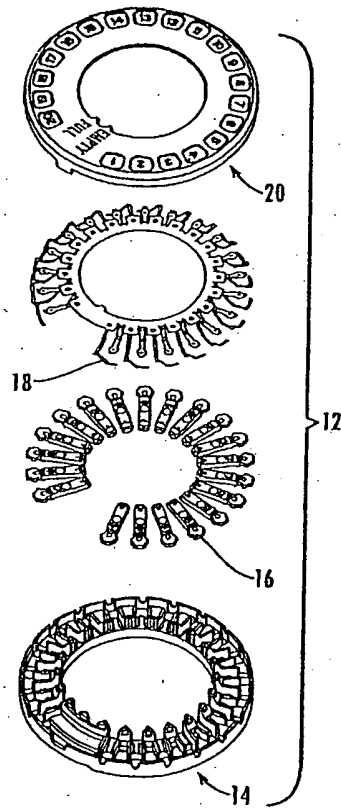


Fig. 2b




Fig. 2a

3/44

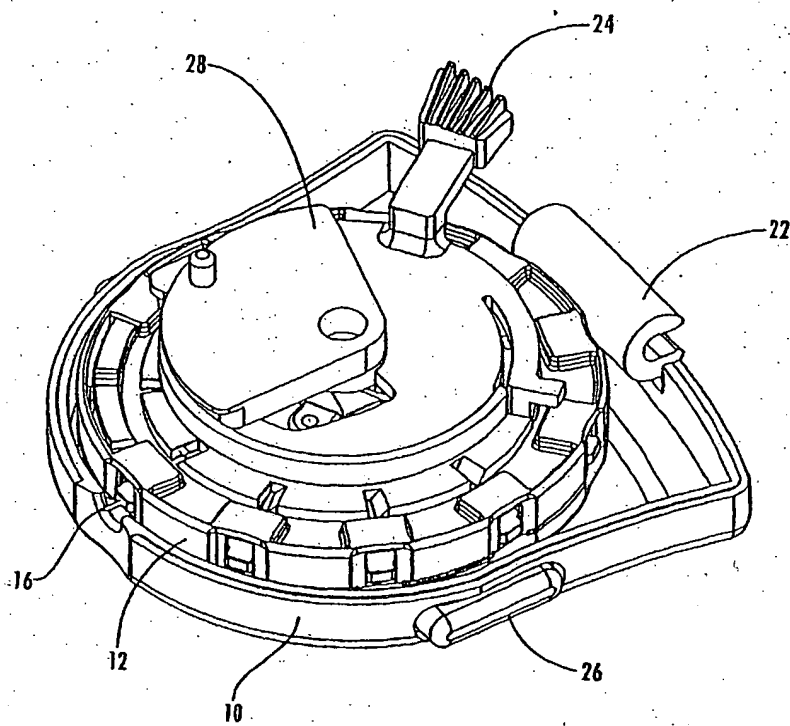


Fig. 3

4/44



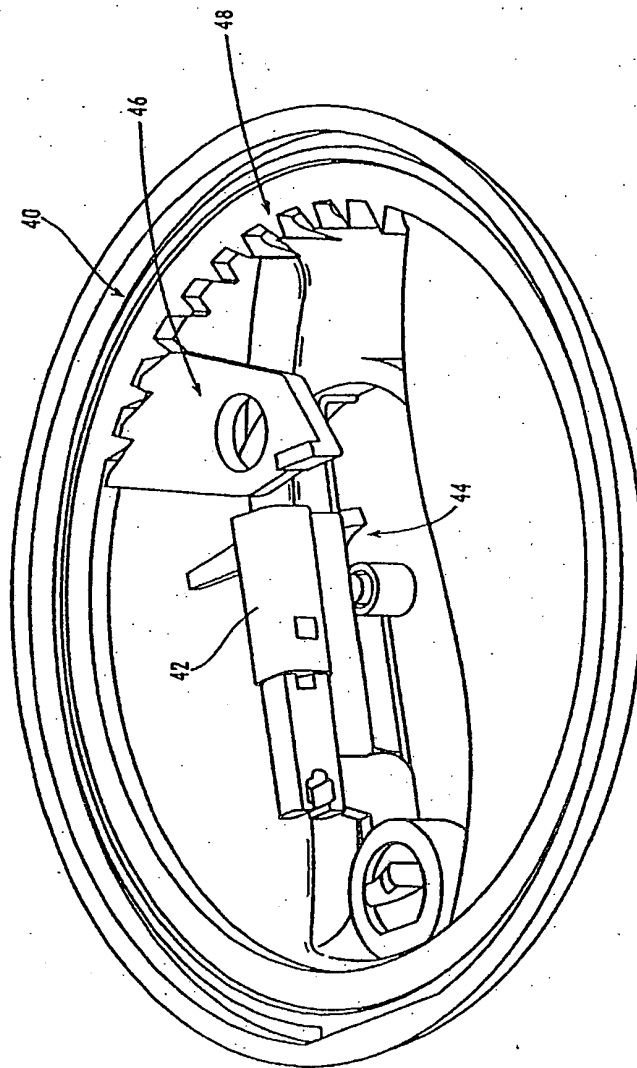


Fig. 4

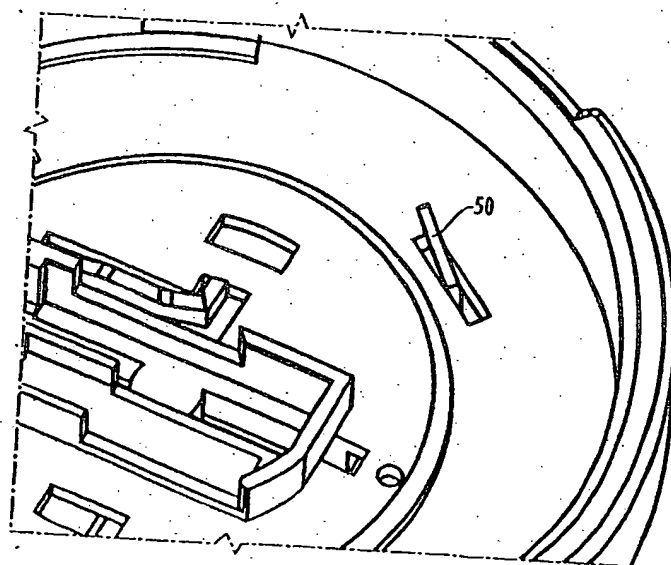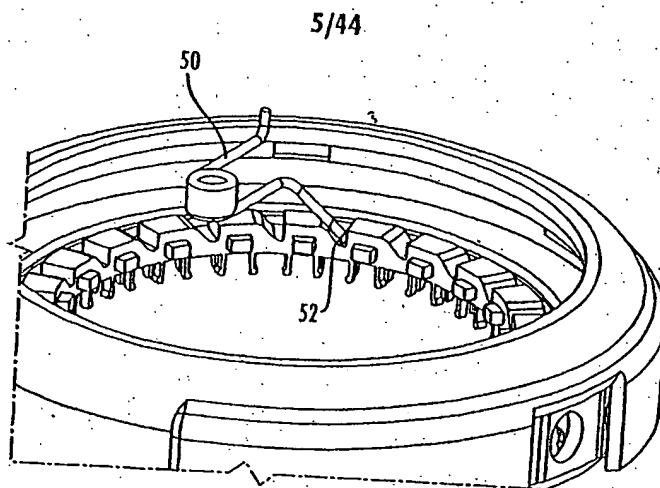

6/44

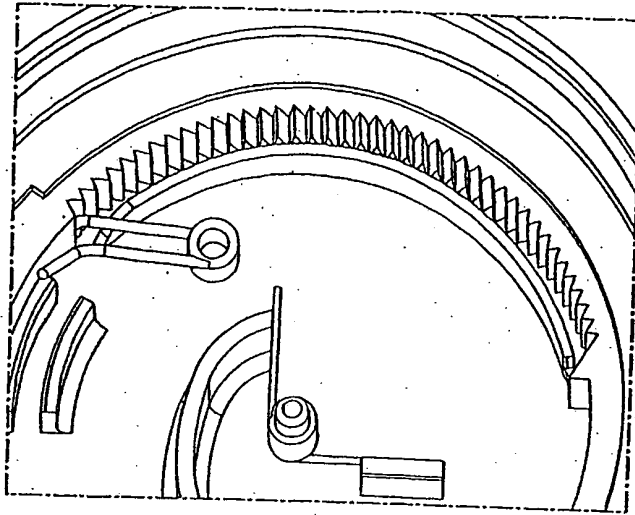


Fig. 5c

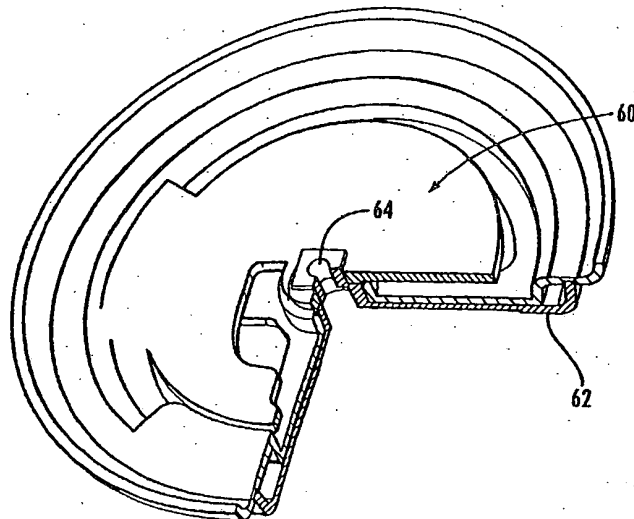


Fig. 6

7/44

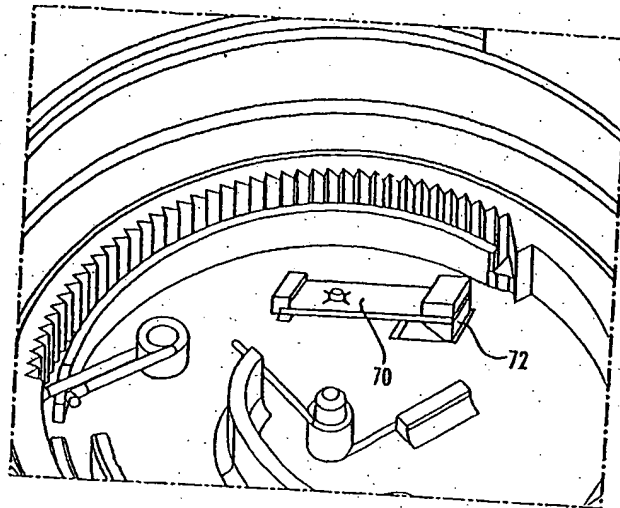


Fig. 1a

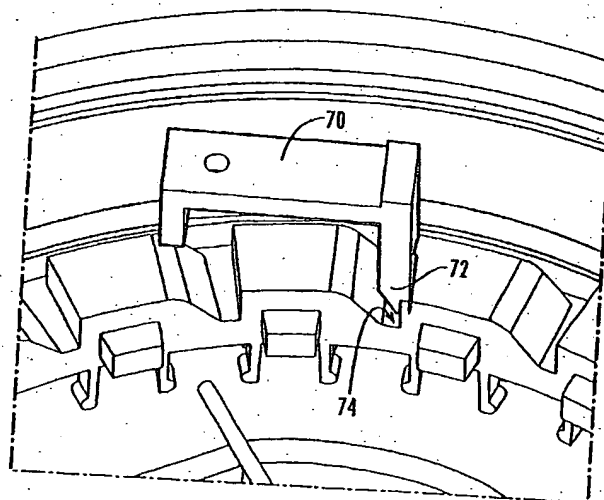


Fig. 1b

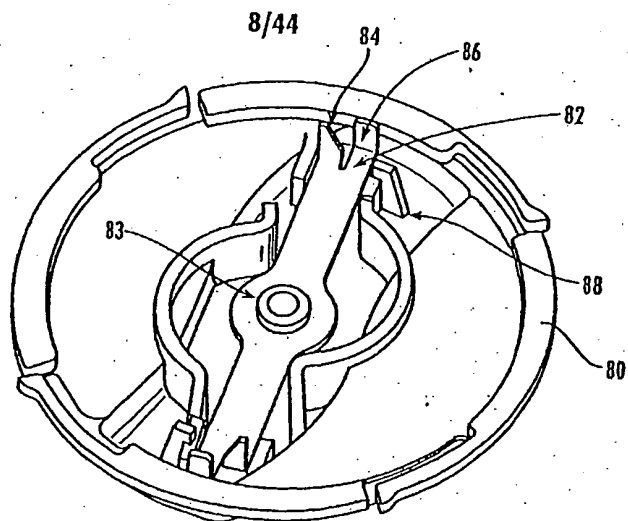


Fig. 8a

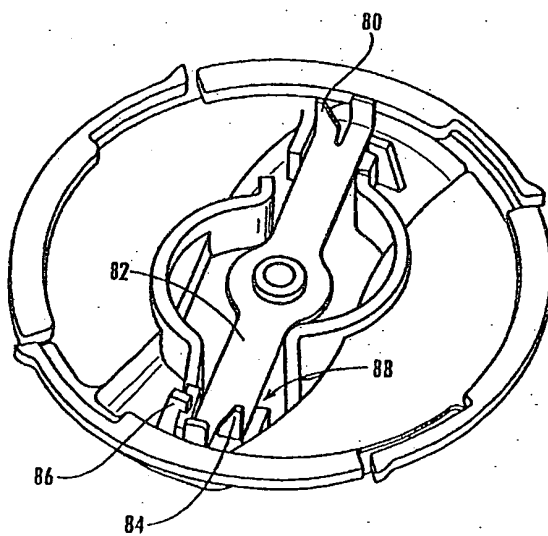


Fig. 8b

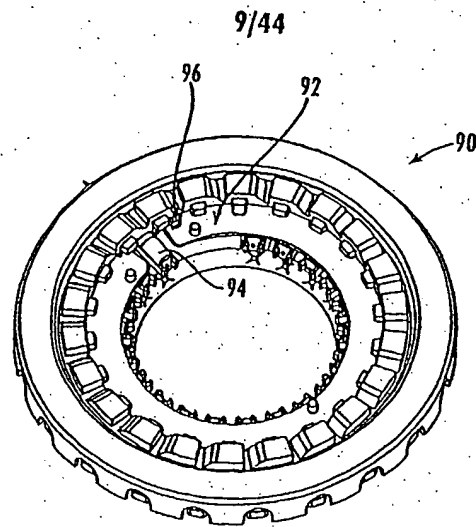


Fig. 9

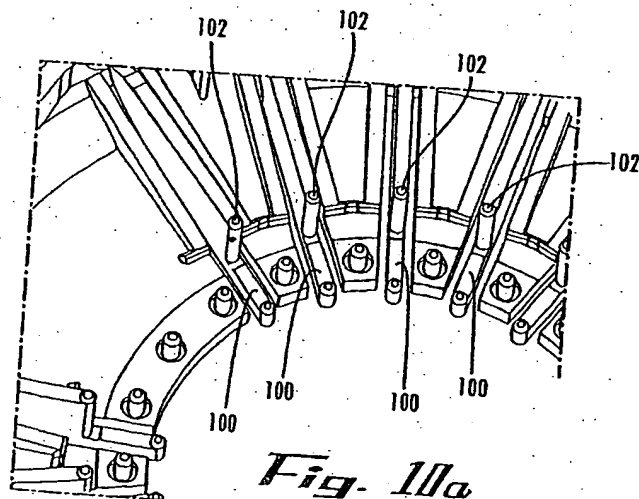


Fig. 10a


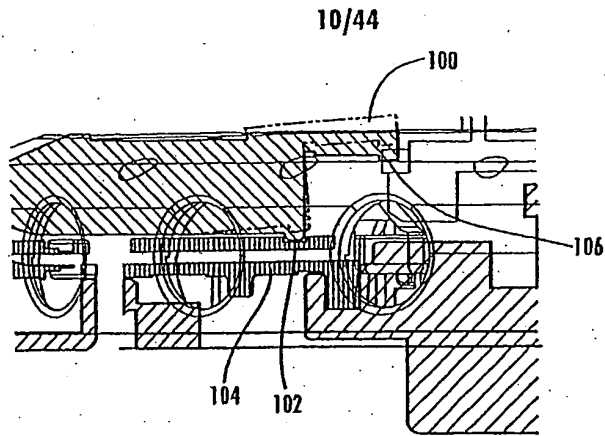


Fig. 10b

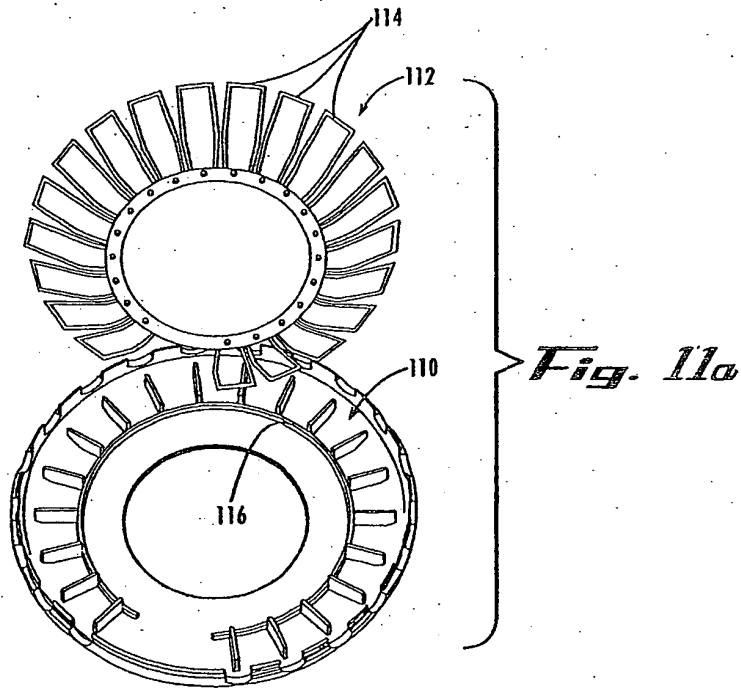

11/44

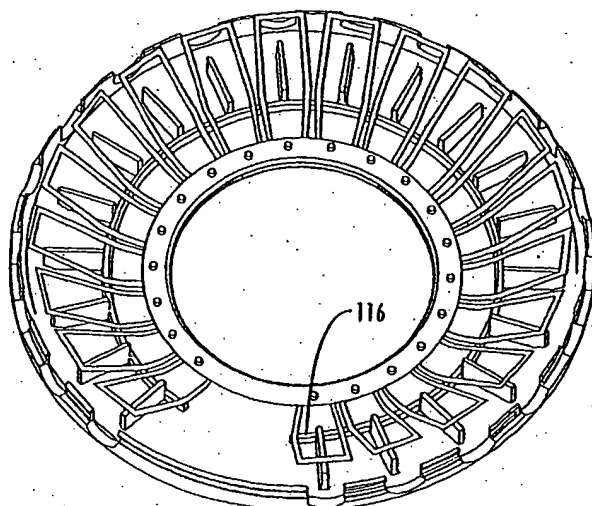


Fig. 11b

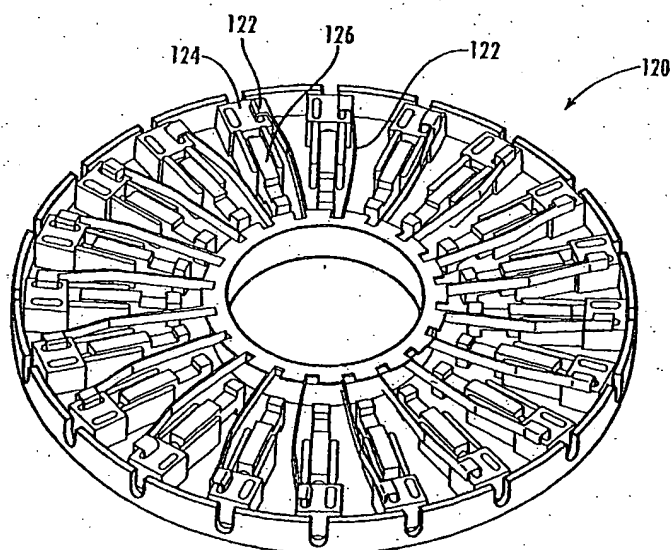


Fig. 12

12/44

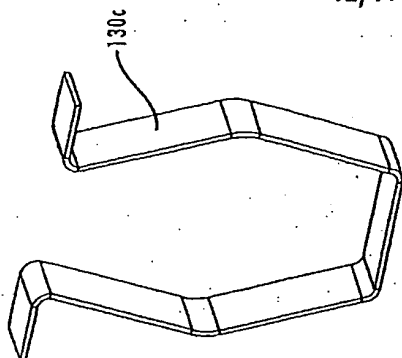


Fig. 13c

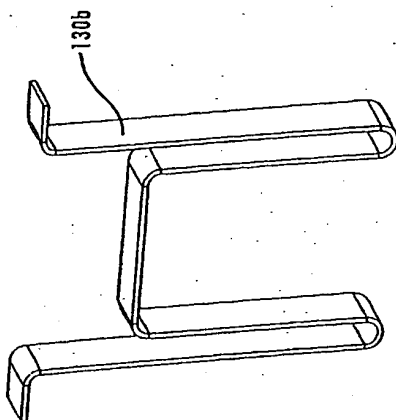


Fig. 13b

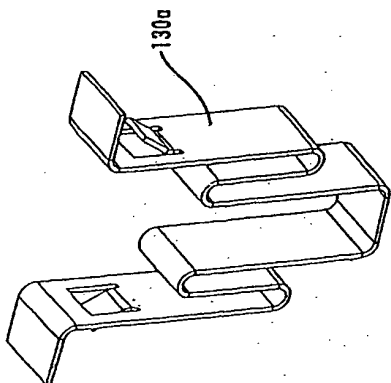


Fig. 13a

13/44

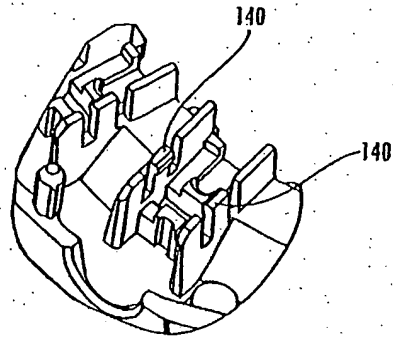


Fig. 14

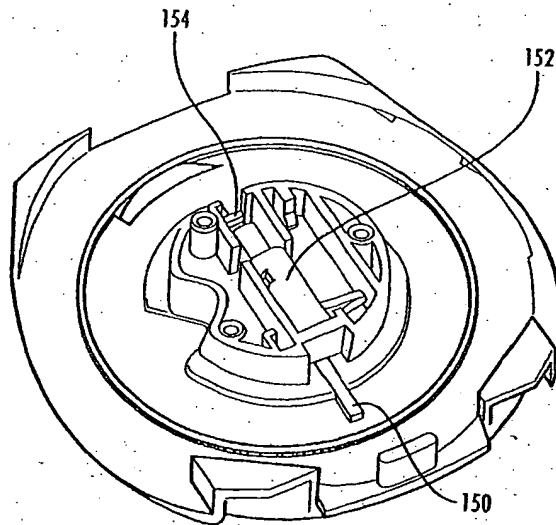


Fig. 15

14/44

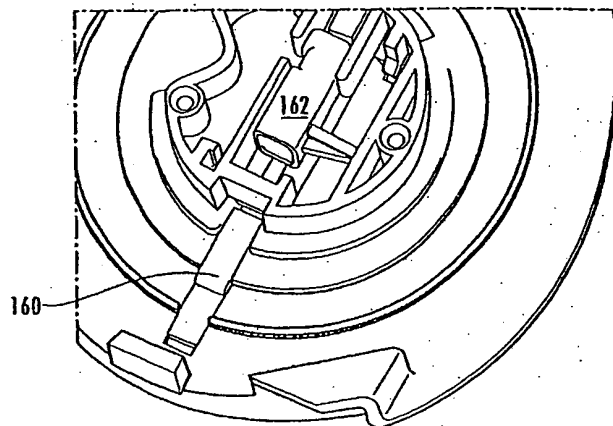


Fig. 16a

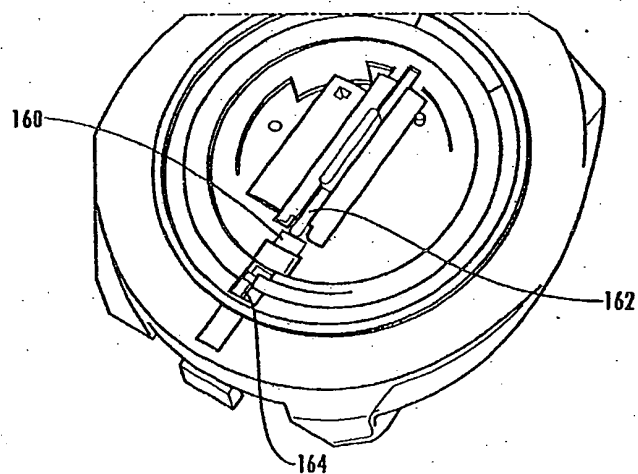


Fig. 16b

15/44



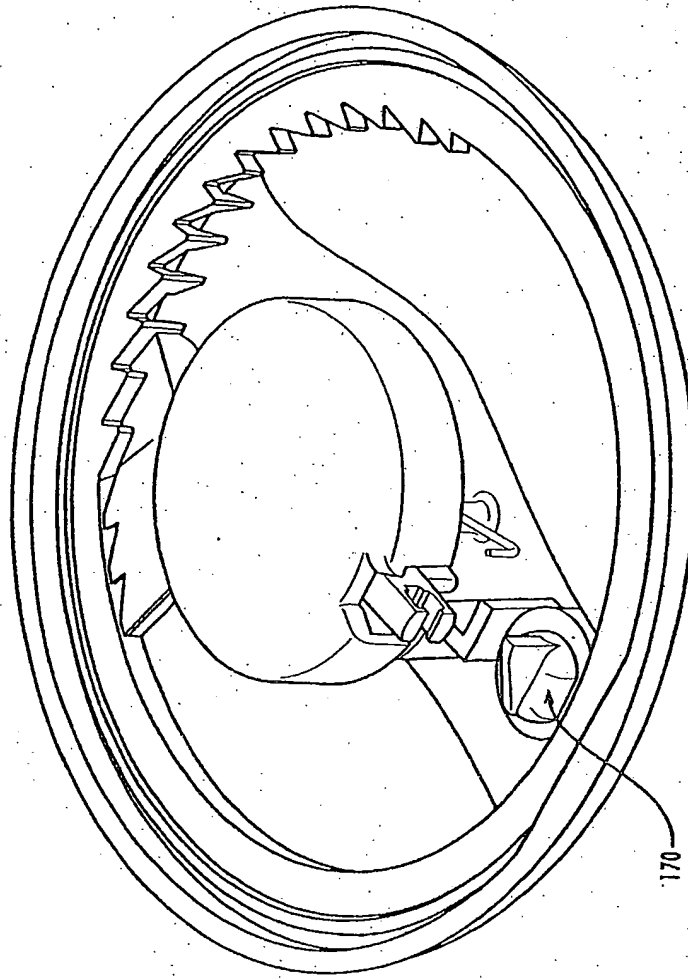


Fig. 17

16/44

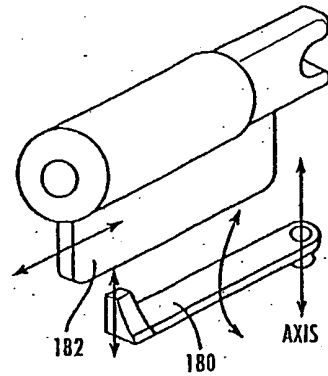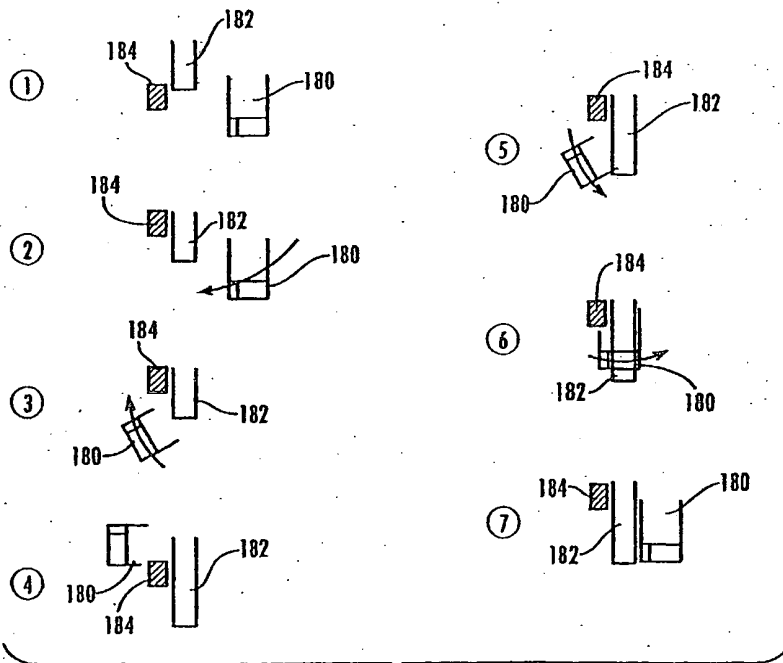

- ① Piston End
- ② Begin Turning Advancer
- ③ Interlock Moves Past Piston
- ④ Piston Locks Back
- ⑤ Advancer Sweeps Back
- ⑥ Interlock Deflects Under Piston Rib
- ⑦ Interlock Flexes Back up, Locking Advancer

*Fig. 18*

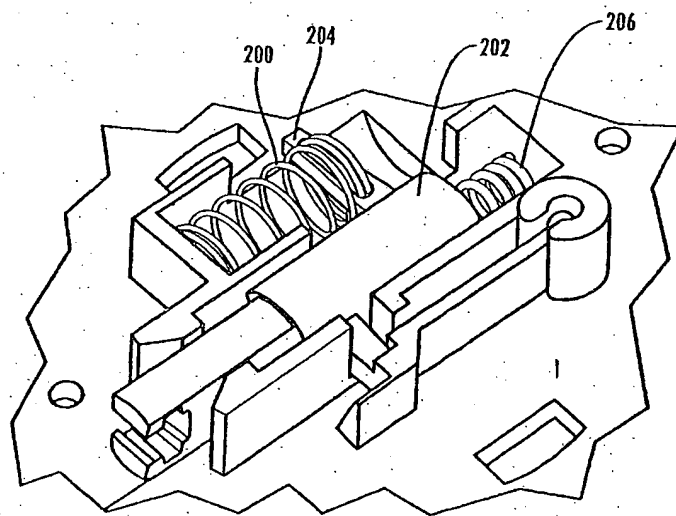
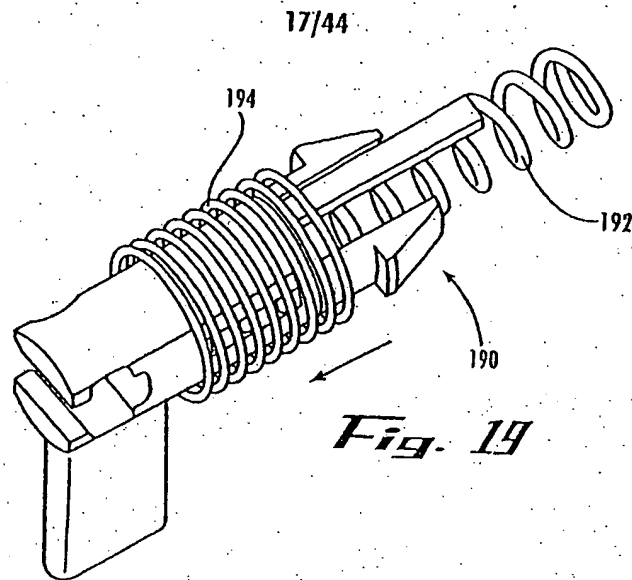


Fig. 20

18/44



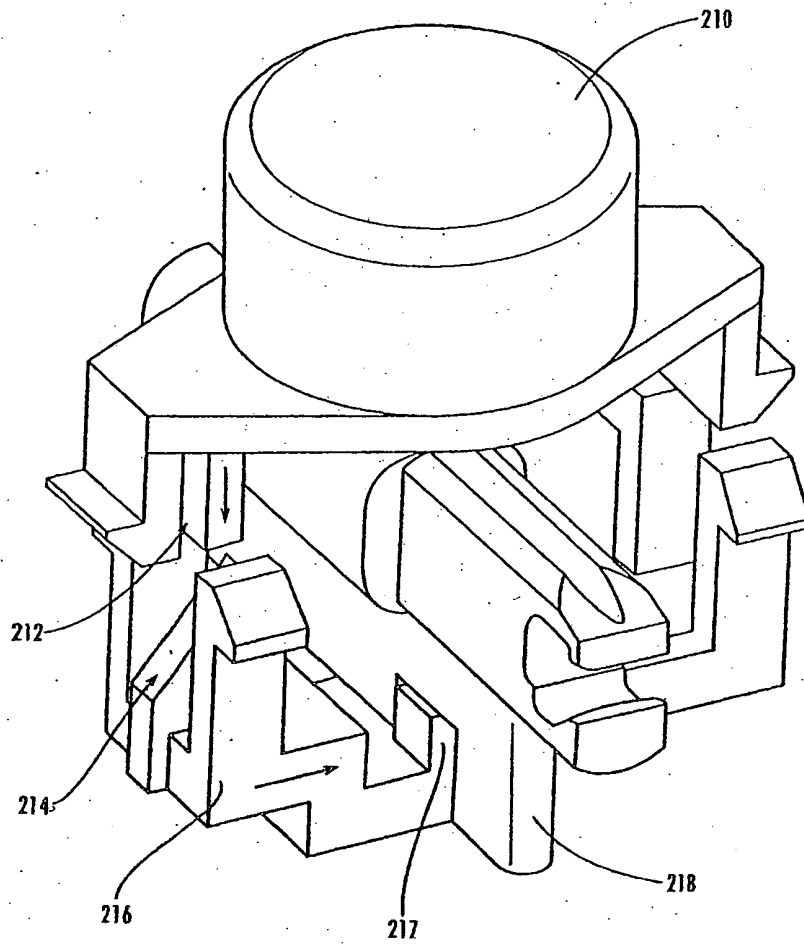



Fig. 21

19/44

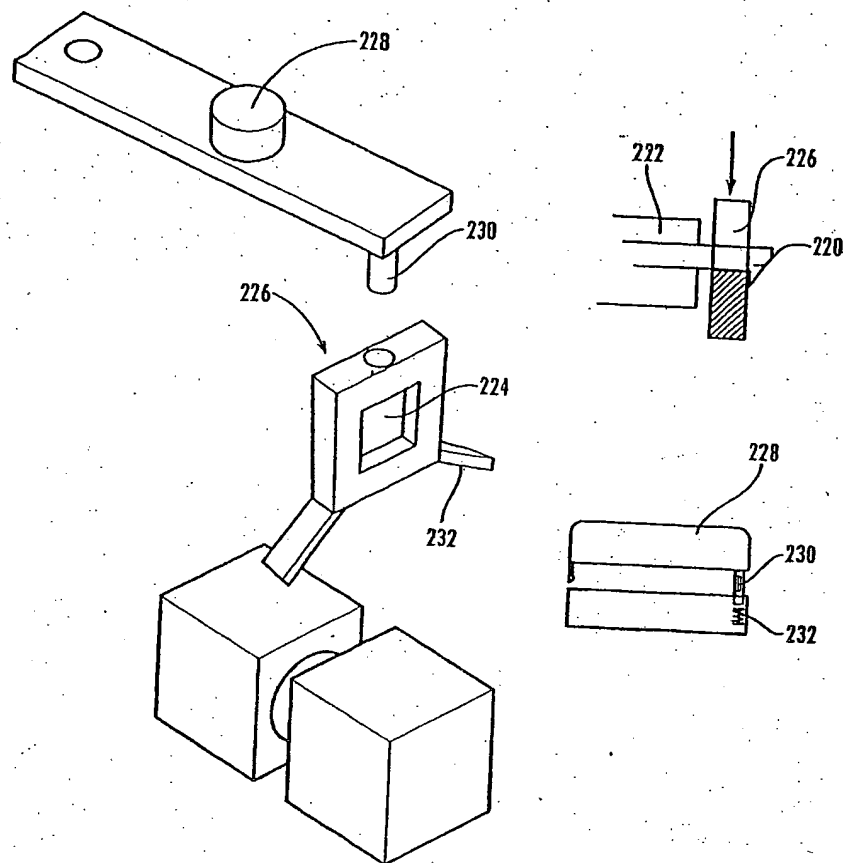

20/44

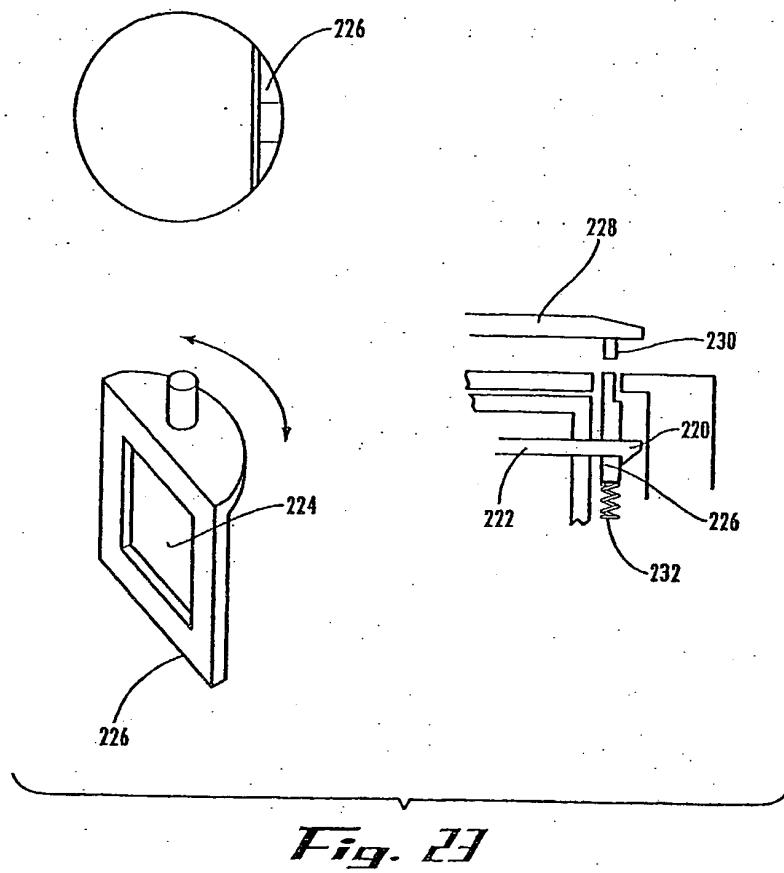

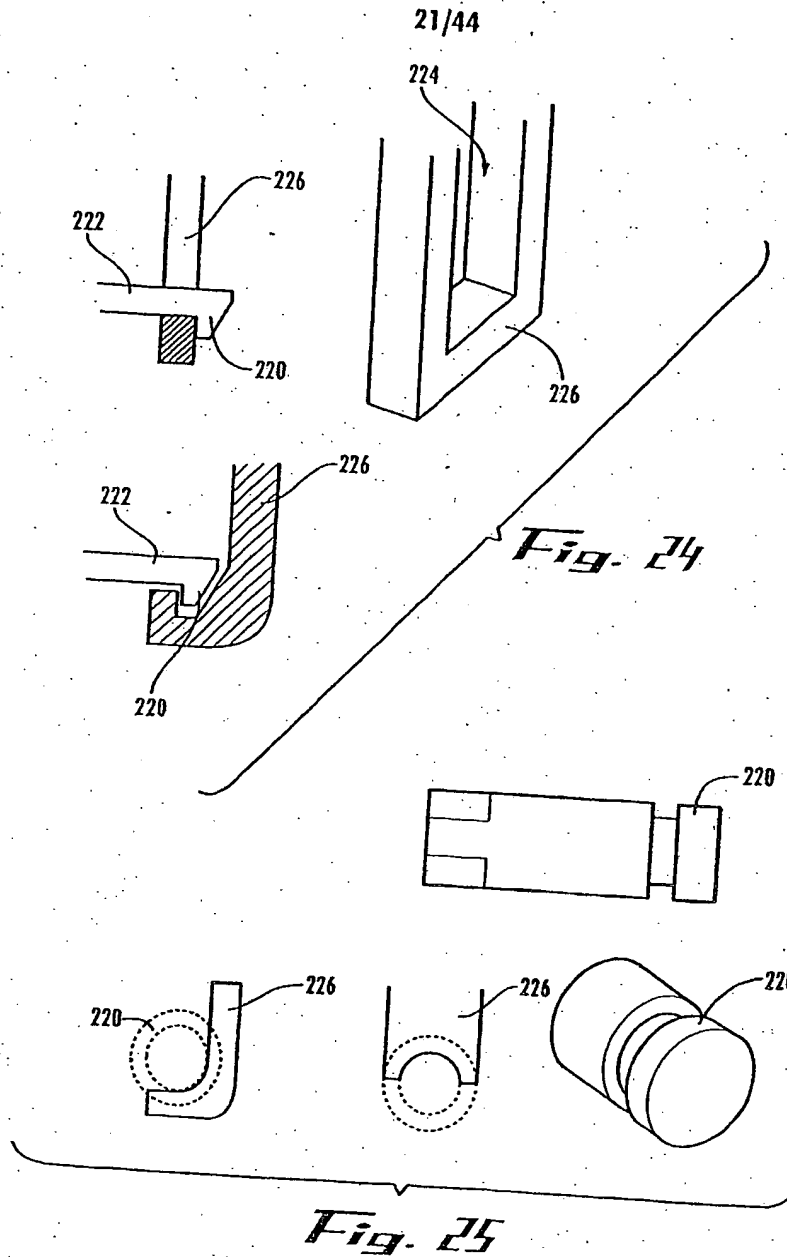

22/44

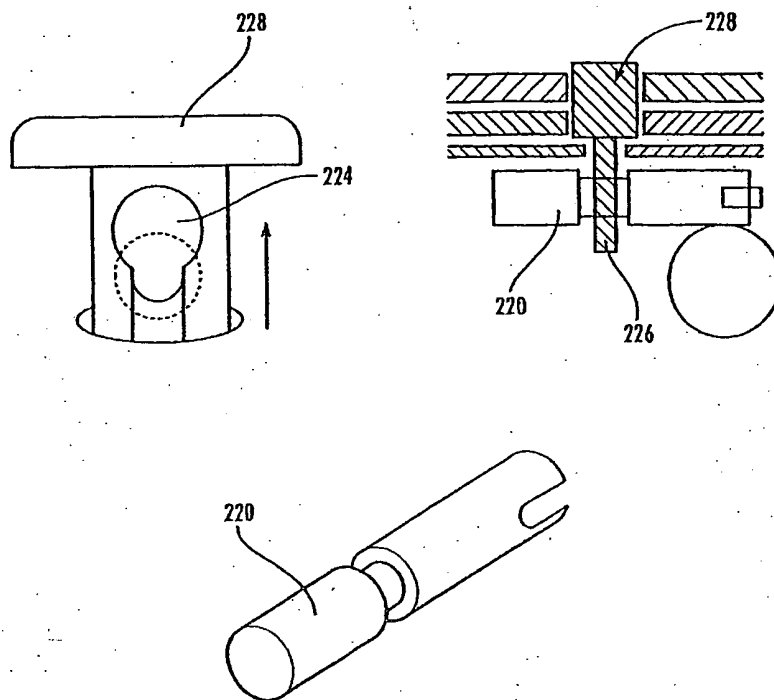


Fig. 26

23/44

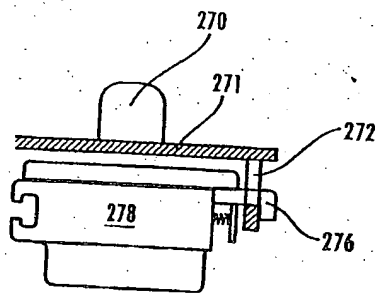
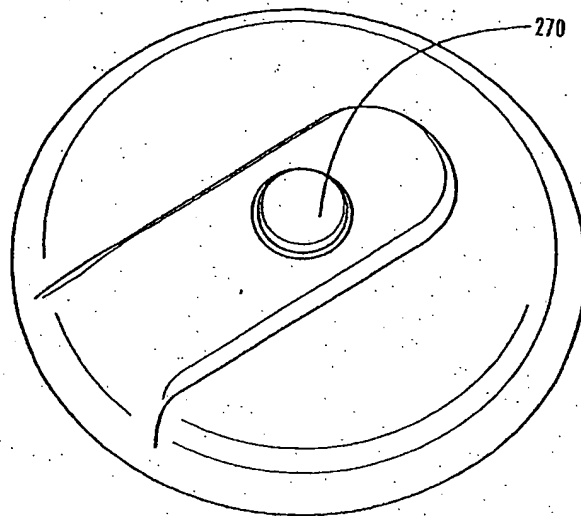


Fig. 27a

24/44

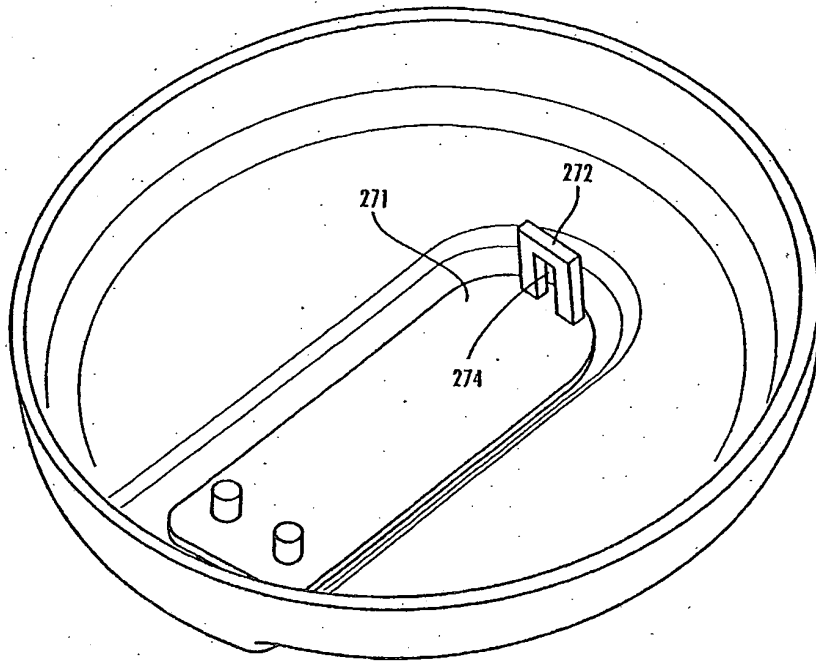


Fig. 27b

25/44

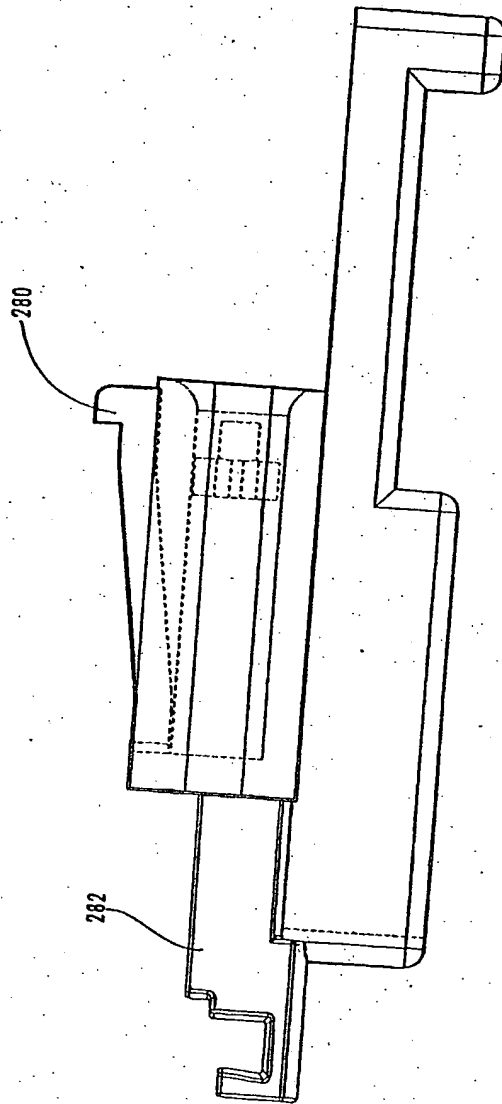


Fig. 2B

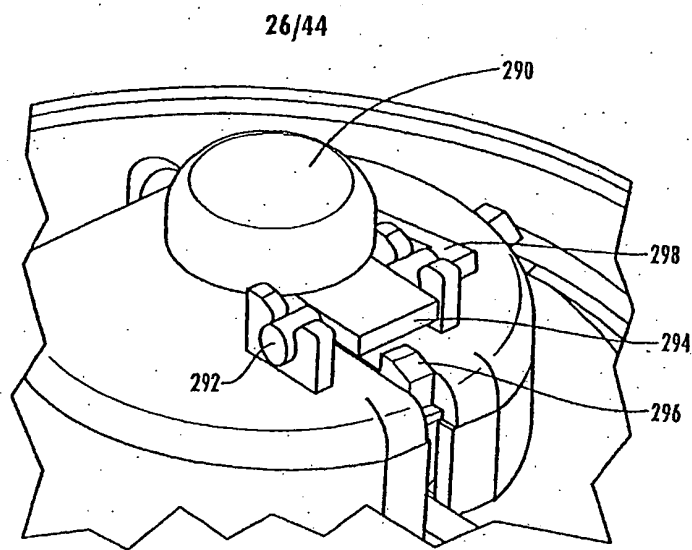


Fig. 29a

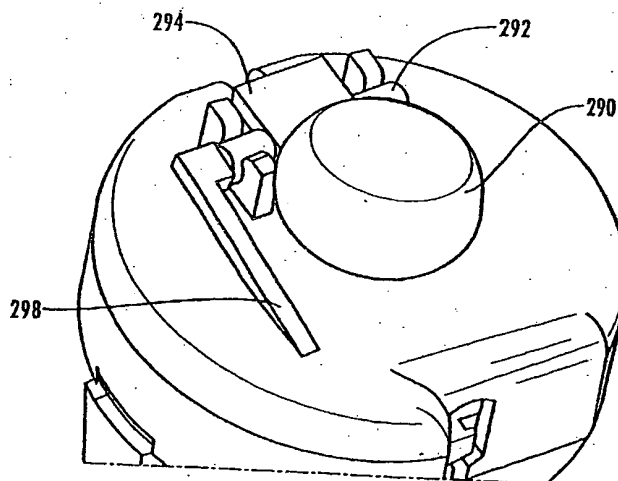


Fig. 29b

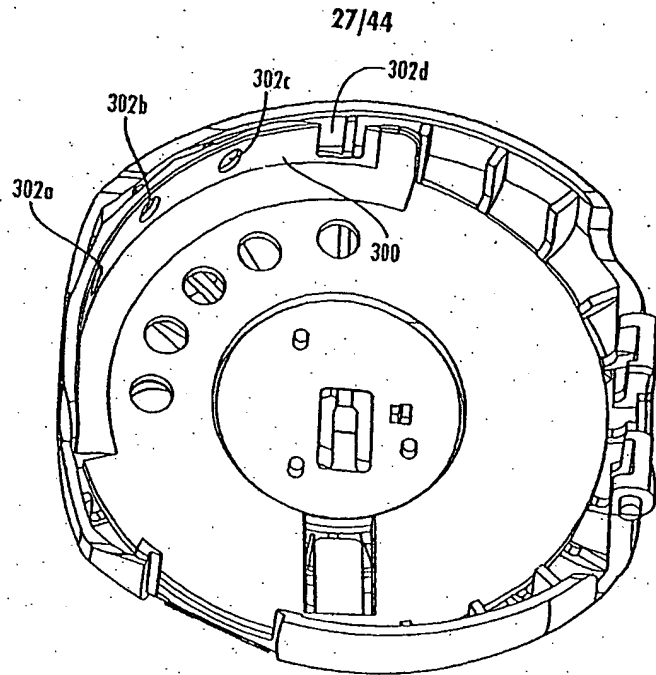


Fig. 30


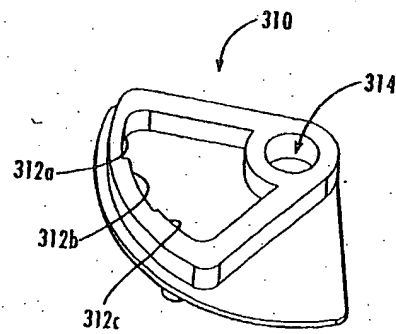


Fig. 31

28/44

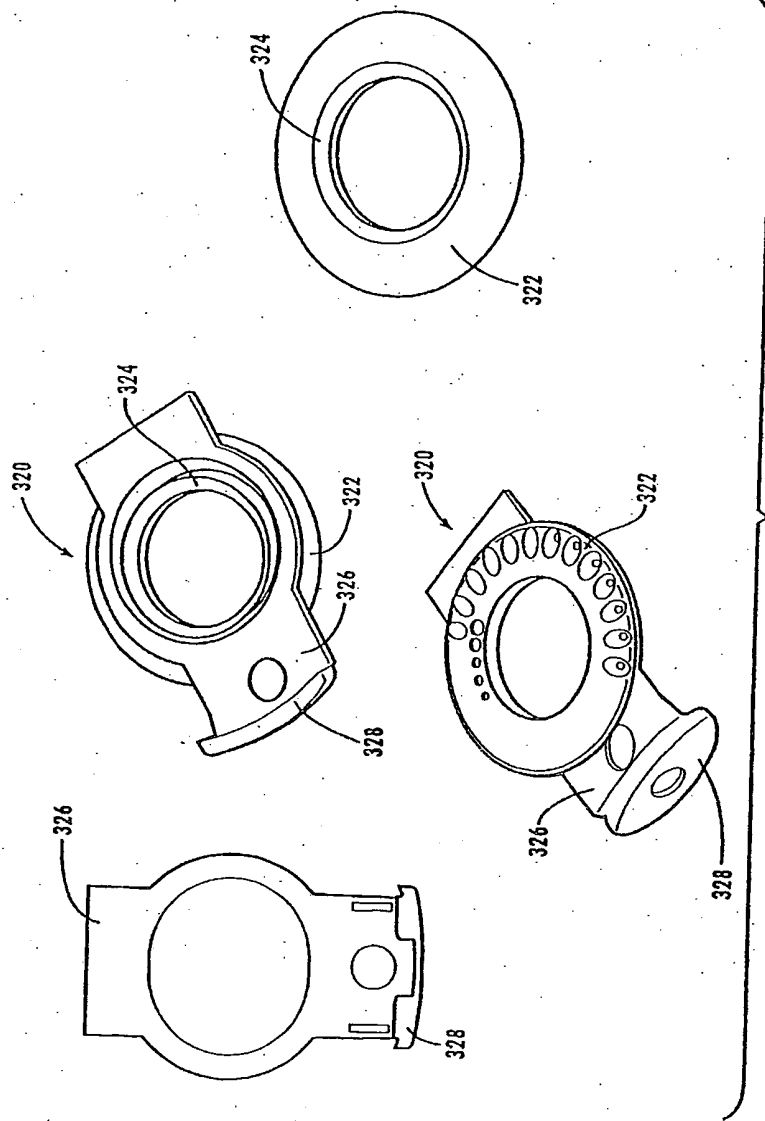

29/44

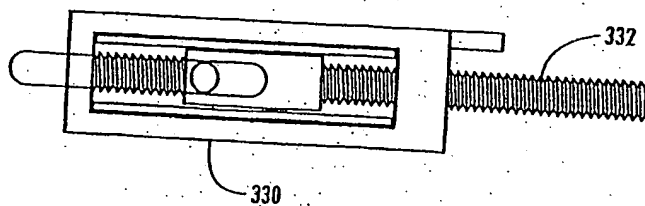


Fig. 33

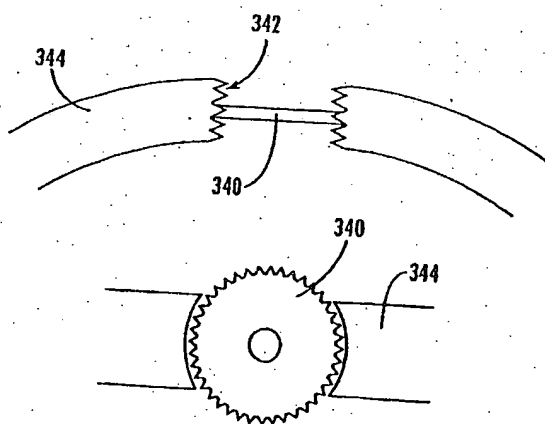


Fig. 34

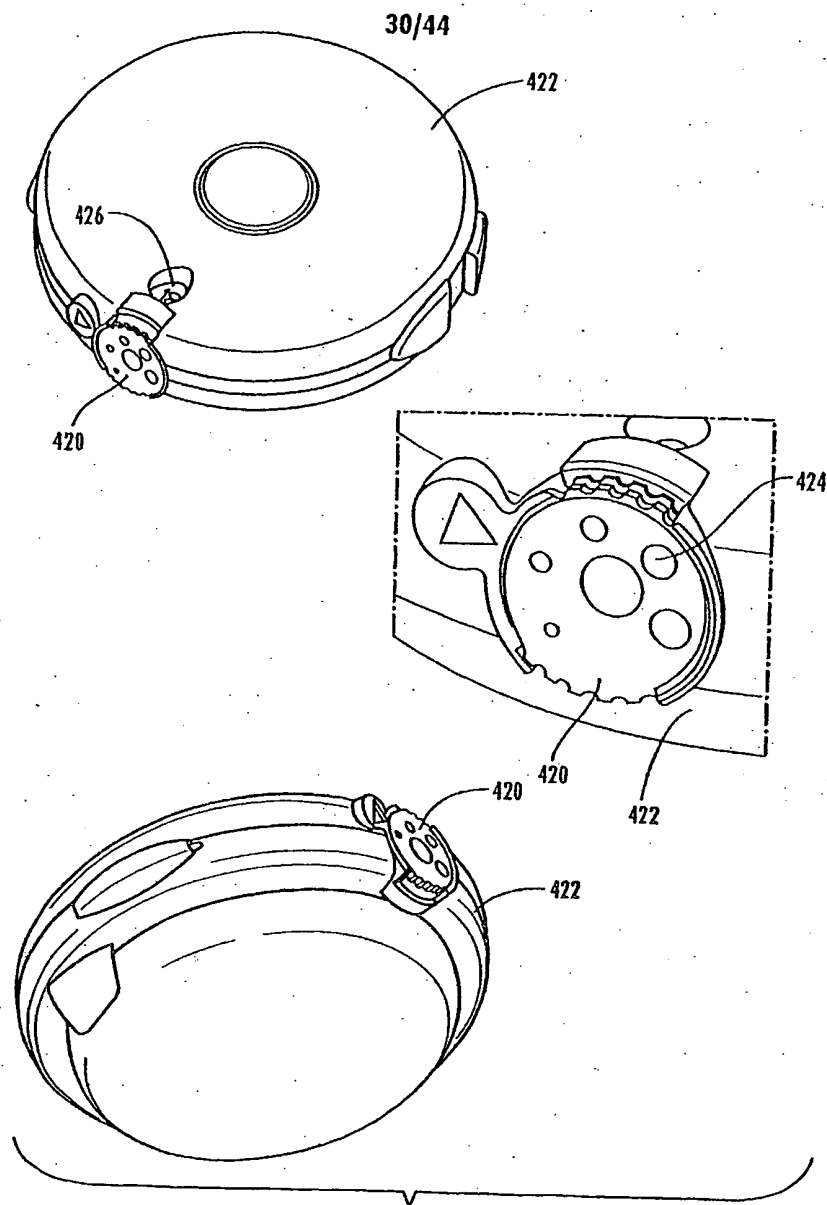


Fig. 35

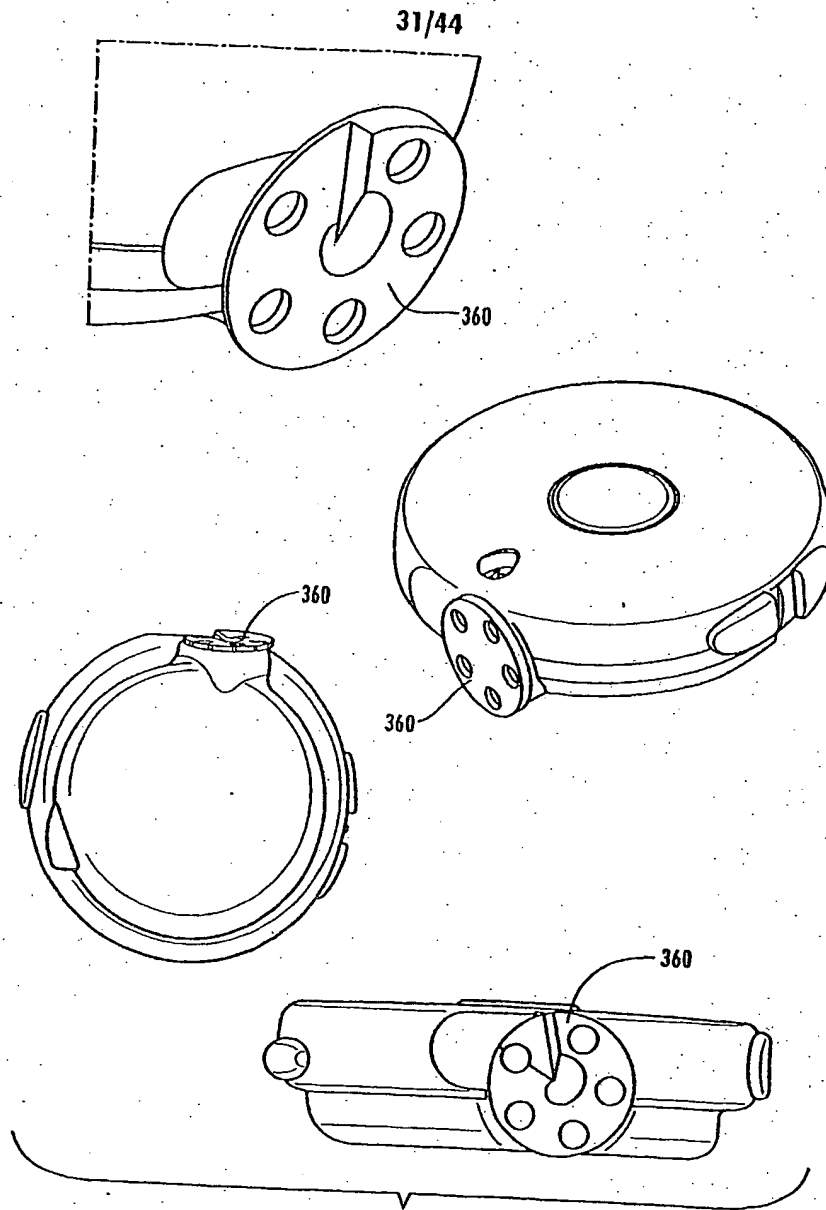


Fig. 36

32/44


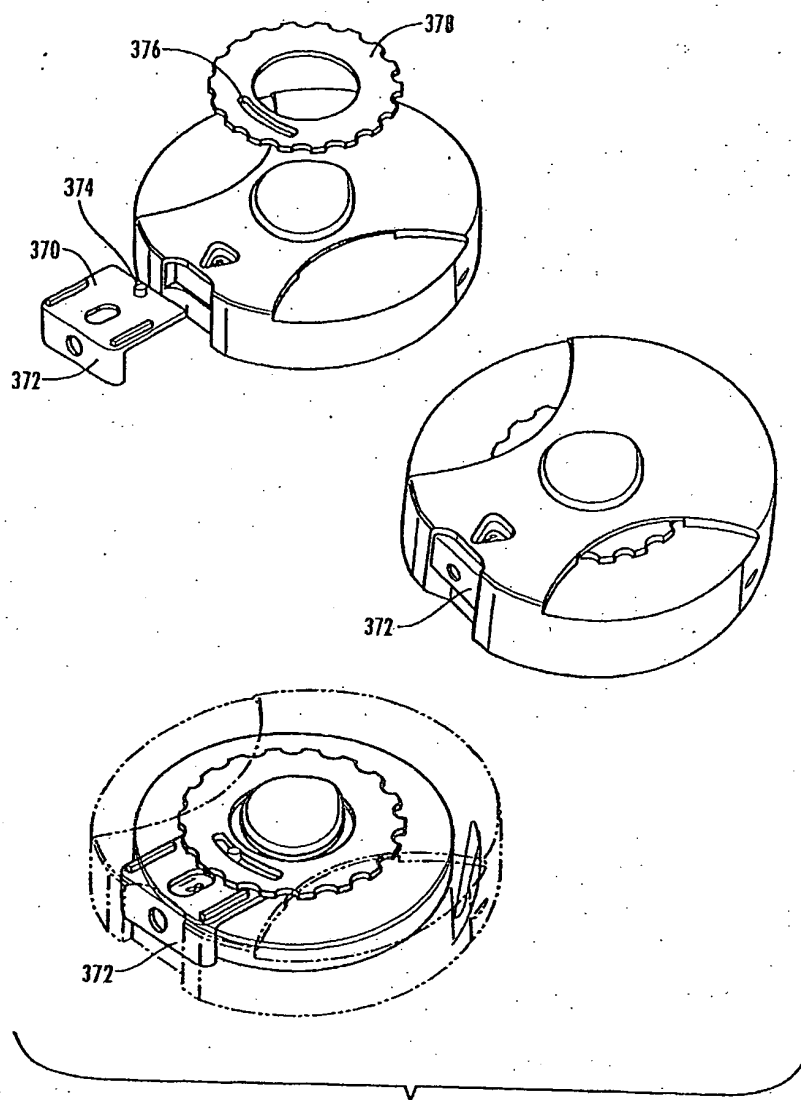


Fig. 31

33/44

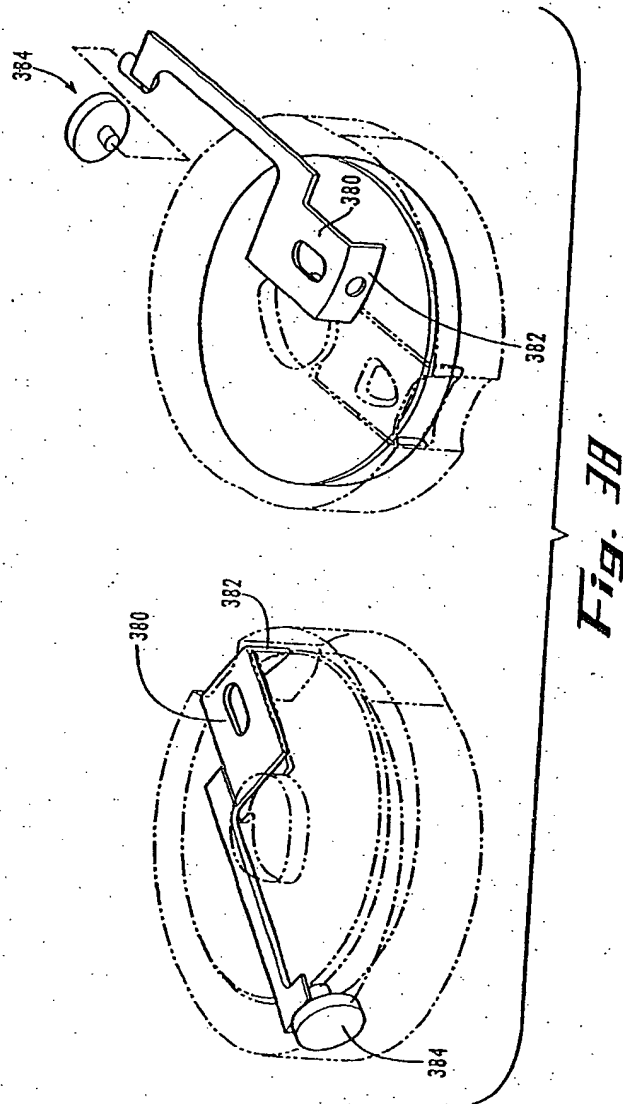

34/44

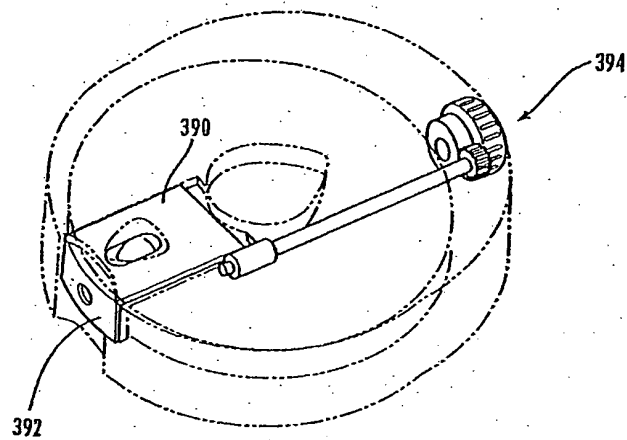


Fig. 39







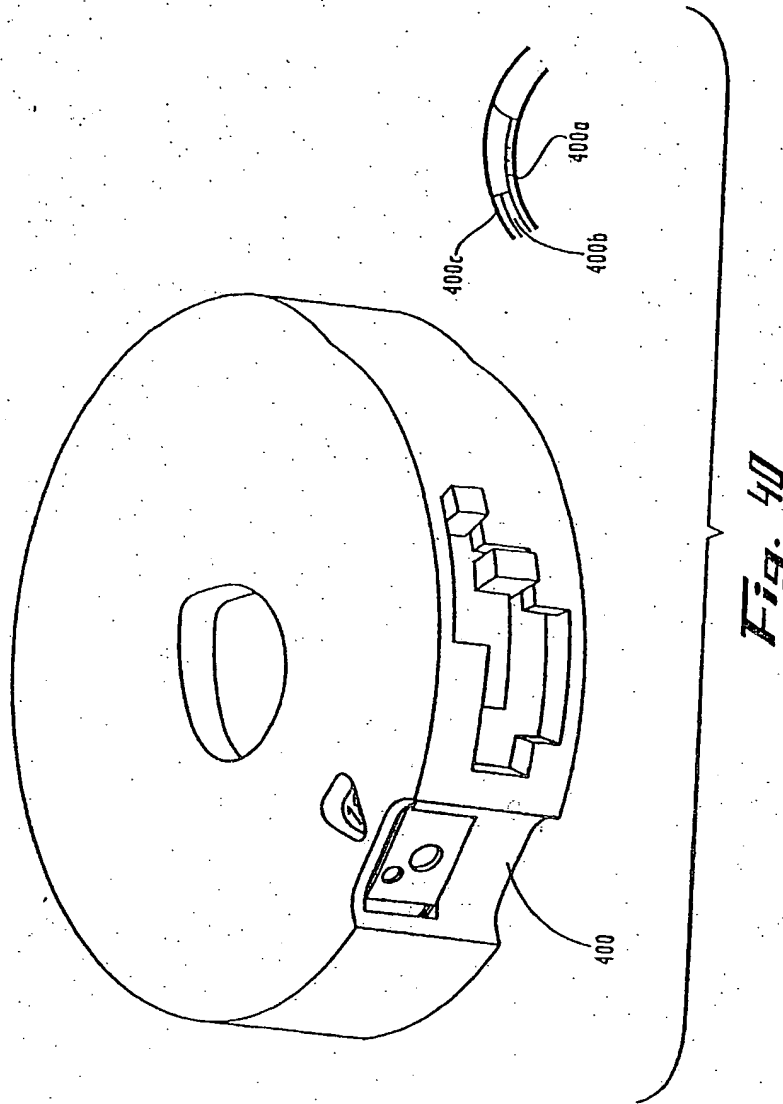


Fig. 40

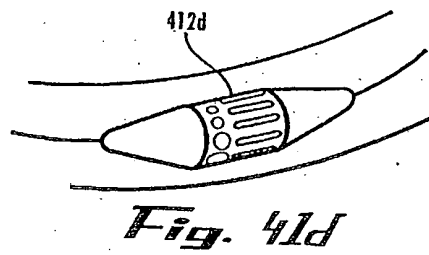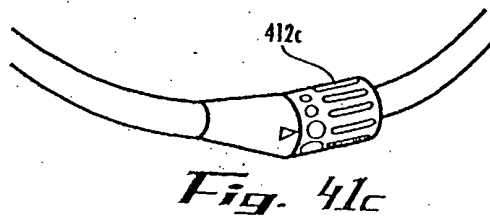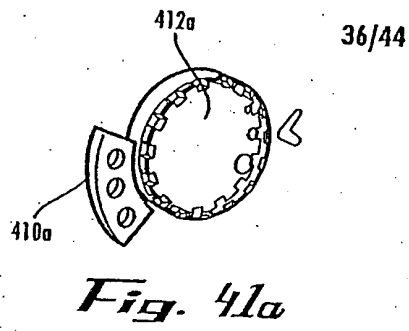

37/44




Fig. 42a

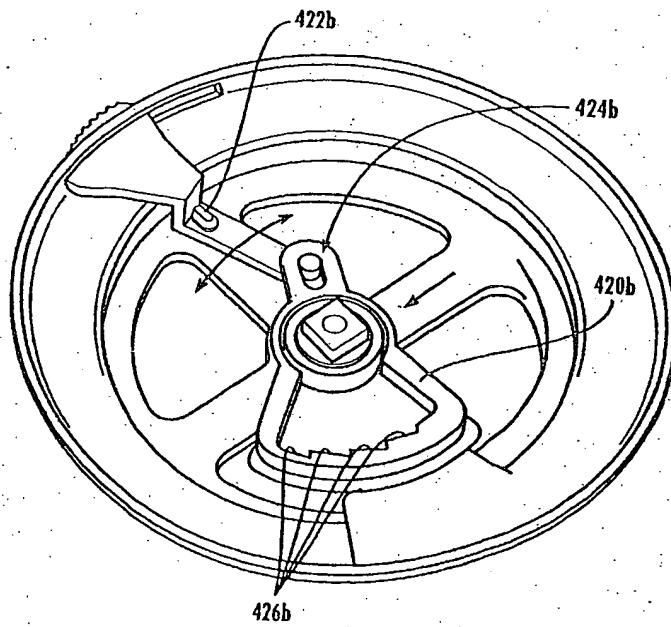


Fig. 42b

38/44

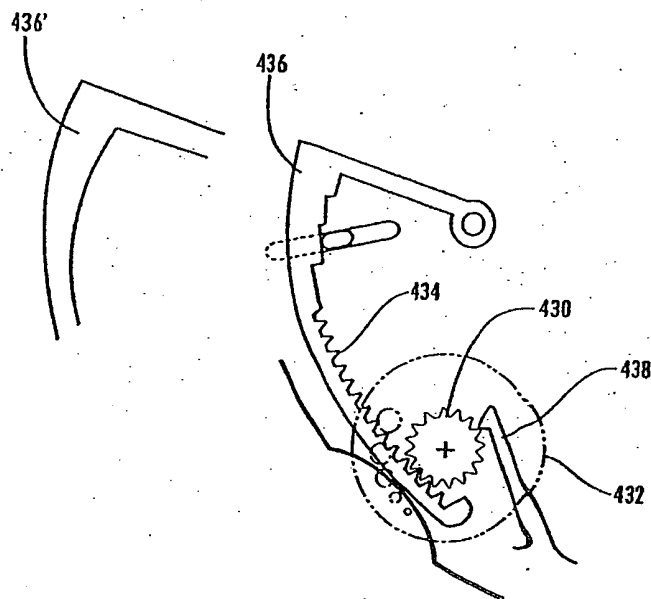


Fig. 43

39 /44

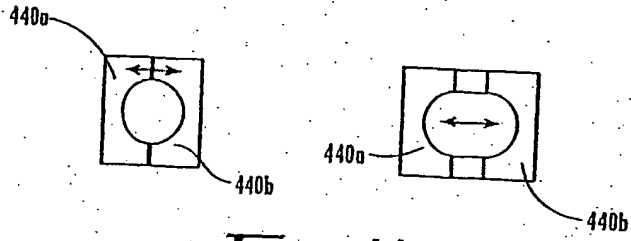


Fig. 44

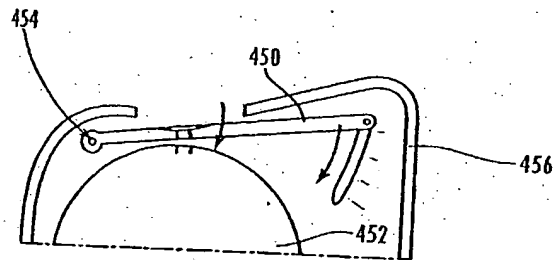


Fig. 45

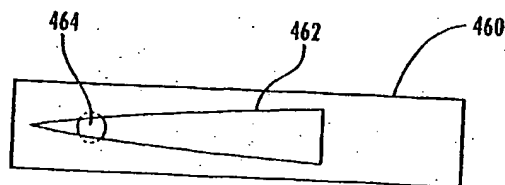


Fig. 46

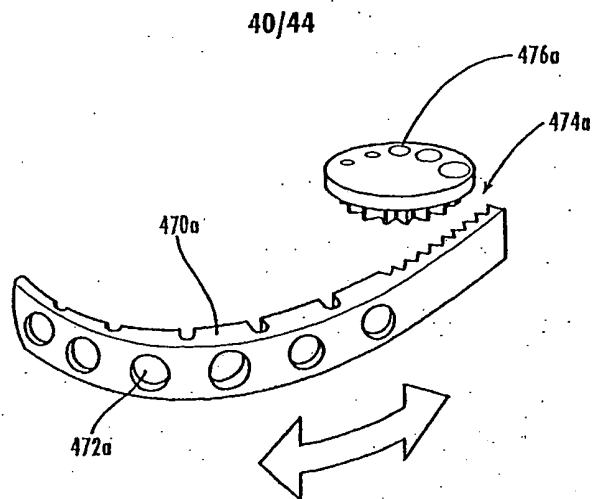


Fig. 47a

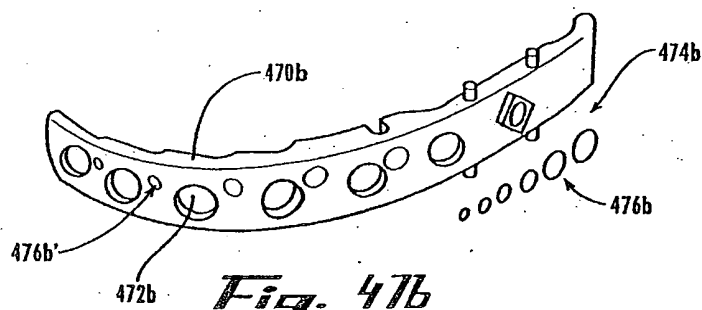


Fig. 47b




Fig. 47c

41/44

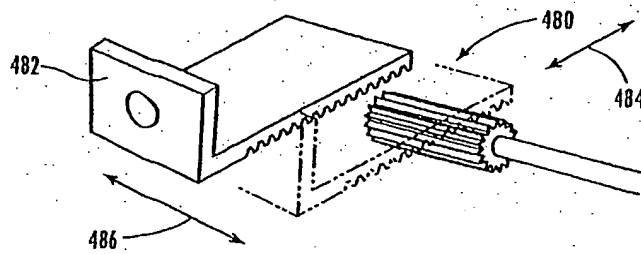


Fig. 48

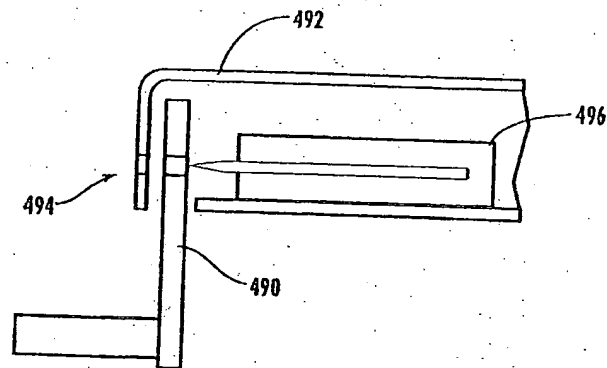


Fig. 49

42/44

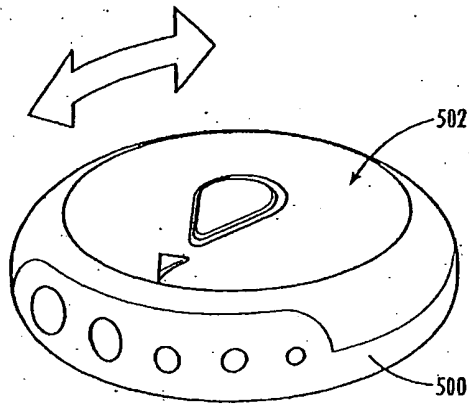


Fig. 50


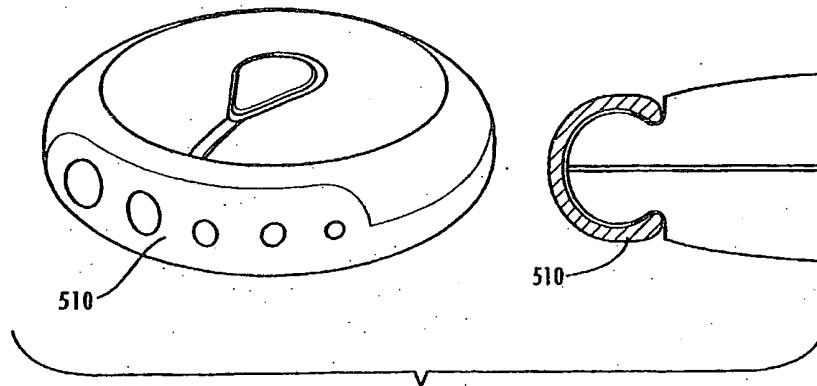



Fig. 51

43/44

Fig. 52

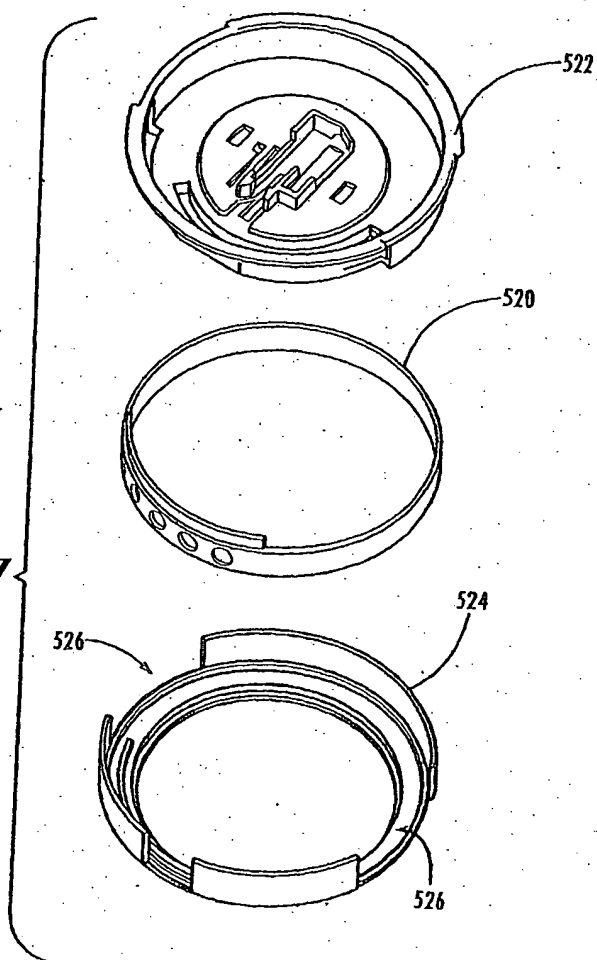

44/44

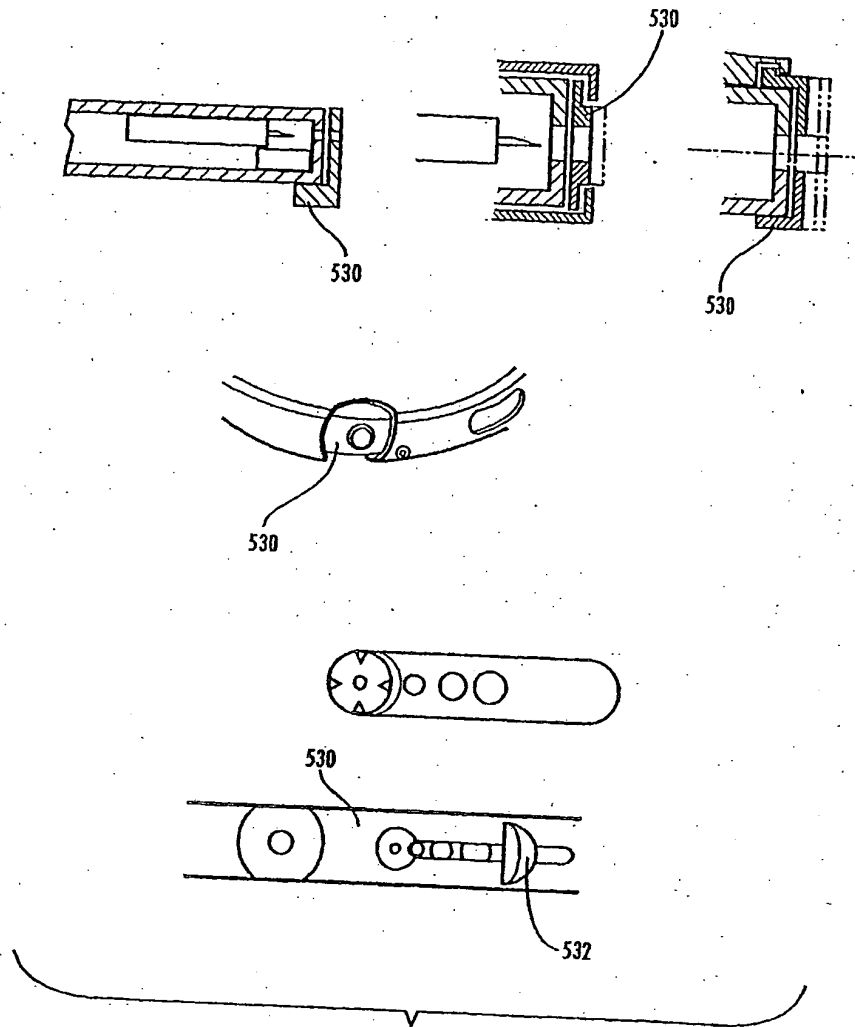

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)